

marine TH

Exterior: IP67 Buried and surface mounted TH accent floodlights



APPLICATION

- Fountains
- Recessed and projecting sculptures
- Trees
- Facades
- Pools
- Gardens
- Drives
- Steps
- Walkways

SPECIFICATION

- IP67 dust and watertight ingress protection
- Class 1 protection
- Body – corrosion resistant die cast aluminium alloy finished Black to RAL 9005
- Suitable for 50W mains tungsten lamp – GU10 lamp holder
- Tempered shock resistant safety glass lens
- M12 x 1.5mm cable entry with 1m of cable (recessed), 5m (surface)

Recessed version only

- 316 stainless steel front frame, round or square

Surface cradled option only

- Die cast aluminium front frame finished Black to RAL 9005






Marine TH Surface





Marine TH Recessed Square

DIMENSIONS

Marine TH Round

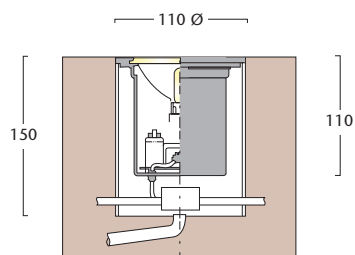

Marine TH Surface

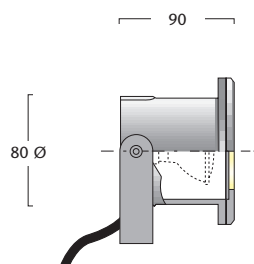

PHOTOMETRY


50W GU10 240V
Reflector Lamp – 50mm

HGT	LUX	Ø
2.0m	850	90cm
1.5m	1500	67cm
1.0m	3350	45cm

SURFACE ACCESSORIES



Ground Spike



Glare Shield

ORDER CODES – MARINE TH

IP67 BURIED AND SURFACE MOUNTED TH ACCENT FLOODLIGHTS

SUPPLIED LESS LAMP	LUMINAIRE
50W TH Mains Recessed Round	MATR50/R
50W TH Mains Recessed Square	MATR50/Q
50W TH Mains Surface	MATS50
Surface Ground Spike	MATS/K
Surface Glare Shield	MATS/G

To specify state:

IP67 surface mounted 50W mains tungsten halogen accent floodlight with a corrosion resistant die cast aluminium alloy finished Black to RAL 9005 and tempered shock resistant safety glass lens – as Whitecroft Lighting MARINE SURFACE TH

To specify state:

IP67 buried 50W mains tungsten halogen accent floodlight with 316 stainless steel bevelled front frame, round or square and tempered shock resistant safety glass lens – as Whitecroft Lighting MARINE BURIED TH

QuickLink

MATH

Go