

Mini Spot 65

IP65 surface mounted spotlight for feature lighting

Whitecroft
lighting

IP65

LED



Ground Spike



Graphite Grey



Shutter & Cowl



Silver/grey

Optics

- 4000K LED
- 3000K LED option
- Light output options:
 - Nominal 2100 lumens, 30W
 - Nominal 3200 lumens, 42W
- Ra90 colour rendition
- Wide and narrow beam distribution options

Body

- IP65, IK08 protection rated
- Die cast aluminium body
- Polyester powder coated finished graphite grey or silver/grey finish suitable for saline and corrosive environments
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- Tempered glass diffuser
- Adjustable aiming direction with protractor scale
- Surface mounting
- Optional mounting 'spike' for installation into soft ground
- Optional coloured filters (recommended for use with narrow beam version)
- Optional cowl or shutter for light control
- Supplied with IP rated cable gland
- Fixed output driver as standard, DALI dimming option
- Graphite grey RAL 7024
- Silver/grey RAL 9007

Order codes

Graphite Grey, 4000K

Graphite Grey	Fixed Output	LL/CW	L70
2119 lumen, 30W - Narrow beam	MNLH14KNG	71	50k
3531 lumen, 42W - Narrow beam	MNLH24KNG	84	50k
2140 lumen, 30W - Wide beam	MNLH14KWG	71	50k
3198 lumen, 42W - Wide beam	MNLH24KWG	76	50k

Accessories

GROUND MOUNTING SPIKE (2 per luminaire where required)	MCLSPIKE
COWL ACCESSORY	MNLCOWL
SHUTTER ACCESSORY	MNLSHUTTER
FILTER ATTACHMENT - BLUE	MNLFBLUE
FILTER ATTACHMENT - RED	MNLFRED
FILTER ATTACHMENT - GREEN	MNLFGREEN
FILTER ATTACHMENT - YELLOW	MNLFYELLOW


Options

3000K LED	Replace 4K with 3K	i.e MNLH13KNG
SILVER/GREY	Replace G with S	i.e MNLH14KNS
DALI dimming	Replace 'H' with 'Y'	i.e. MNLY14KNG

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>90	MacAdam 3 SDCM

Dimensions

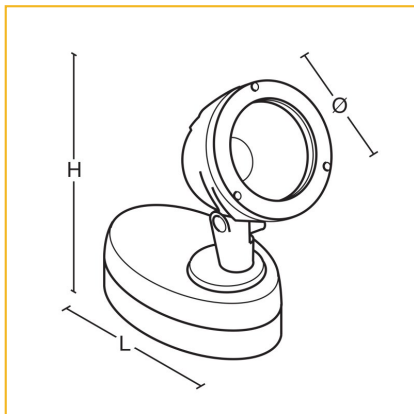


L	H	KG	Ø
220	260	2.7	150

Photometric Performance



42W Narrow
Beam 4000K 3531
Lumens
LOR = 100.0%



42W Wide Beam
4000K 3198
Lumens
LOR = 100.0%

To Specify

Surface mounted IP65 die cast aluminium LED spotlight with narrow or wide beam distribution. Finished in polyester powder coated graphite grey or silver/grey – as Whitecroft MINI SPOT 65