

mirage LED IP65

Ceiling recessed LED luminaire
for outdoor applications




Optics

- Light output options:
 - 1645 lumens (24W) Clear diffuser
 - 1629 lumens (24W) Acrylic feature glass
- Wide beam symmetrical distribution
- Clear flat acrylic diffuser in bezel or acrylic feature optic
- Anodised aluminium reflector

Body

- Extruded and cast aluminium
- IP65 IK10 rated protection
- Finished in Anthracite Grey
- To suit ceiling thickness 5 – 50mm

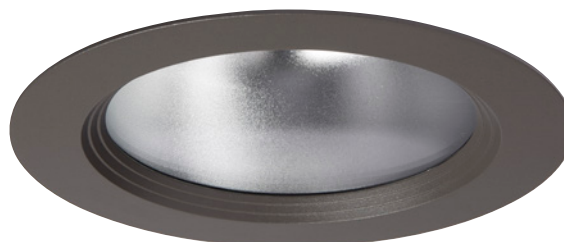

Acrylic feature glass

Order Codes

Mirage LED IP65

1645 lumen (24W)
1629 lumen (24W)

Clear diffuser
Acrylic feature glass

M65AH164K
M65BH164K


Options

DALI DIMMING
3000K

Replace H with **Y**
Replace 4 with **3**

i.e. M65AY164K
i.e. M65AH163K

Dimensions




Ø	H	L	CAØ	KG
202	132	174	185	2.8

LED Performance

Colour Temp	Ra (CRI)	Life Expectancy	Colour Consistency
4000K	≥ 80	L ₇₀ (50,000hrs)	MacAdam 4 SDCM

Photometric Performance



24W 1645 lumen
• LOR = 100%

To Specify

IP65 Recessed LED luminaire with aluminium body and clear diffuser or part screened feature optic. With wide beam distribution – as Whitecroft Lighting MIRAGE LED IP65.