




LAMP PERFORMANCE MATRIX

LAMP TYPE	TOTAL LUMEN OUTPUT	TOTAL CIRCUIT WATTS	LUMENS PER WATT	LAMP LIFE
2 x 24W T5	4000	51	83	16000
4 x 14W T5	5400	66	96	16000
2 x 55W TC-L	9600	116	87	12000

- Office applications:
2 x 24W T5 gives 350 – 400 lux (2.4m x 2.4m spacing)
- Retail applications:
2 x 55W TC-L gives 800 lux (2.4m x 2.4m spacing) or 1066 lux (1.8m x 2.4m spacing) and increased illumination of vertical surfaces

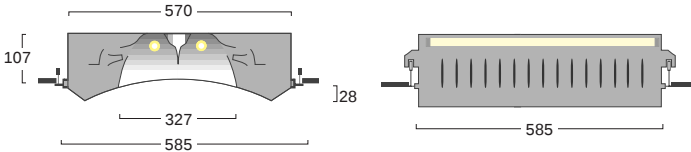

Vivant™

ORDER CODES

THE ADVANCED T5 ARCHITECTURAL LIGHTING SYSTEM

VIVANT™ OFFICE LG3 2.500

LIFT PROFILER	BLEND PROFILER	MATRIX PROFILER	T5 LAMP
VIVL224	—	—	2 x 24W HO
VIVL224HFR	—	—	



Either positive display e.g. Windows software or anti reflective treatment on screen. Typical PC's

VIVANT™ OFFICE LG3 2.1000

LIFT PROFILER	BLEND PROFILER	MATRIX PROFILER	T5 LAMP
—	VIVB224	VIVM224	2 x 24W HO
—	VIVB224HFR	VIVM224HFR	
VIVL414	VIVB414	VIVM414	4 x 14W HE
VIVL414HFR	VIVB414HFR	VIVM414HFR	



To be used where both of the above apply. Typical PC's

VIVANT™ RETAIL NON LG3

LIFT PROFILER	BLEND PROFILER	MATRIX PROFILER	T5 & TC-L LAMP
VIVL255	VIVB255	VIVM255	2 x 55W TC-L
VIVL255HFR	VIVB255HFR	VIVM255HFR	



Retail environments

OPTIONS Add suffix to order code

ST	Suitable for Spring Tee and plasterboard ceilings
----	---

Note: HFR = High frequency dimming 1-10V

EMERGENCY Add suffix to order codes above

EMIN	3 hour integral emergency i.e. VIVL224EMIN
------	--

To specify state:

Semi-recessed architectural 600 x 600 luminaire with a concave metallised living louvre and (lift/blend/matrix) luminance profilers projecting 28mm below the ceiling delivering light spill on the ceiling and a smoothly graduated wall wash. Optic to incorporate intermediate brightness zones for maximum visual comfort – as Whitecroft Lighting VIVANT™.