

Javelin Semi Recessed

MOTIVATION

Where ceiling void depth is exceptionally restricted or where the ceiling requires added visual interest the Javelin Semi-Recessed range has been designed to offer a T5 solution.

APPLICATION

- Offices
- Reception areas
- Retail applications
- Corridors
- Board rooms
- Conference rooms

SPECIFICATION

Body

- Body compatible with these ceiling types:
 - Exposed Tee 25mm or 15mm
 - Plasterboard
- Body fully boxed, jointed and flanged
- Die cast aluminium end caps
- White RAL9010 20% gloss polyester powder paint
- Side support brackets for exposed T ceiling supplied
- 30mm recess depth into void
- 49mm protrusion into room
- Curved side panels micro perforated
- Panels give soft lit appearance
- Flanged body reduces light spill
- High frequency or high frequency regulating gear standard
- Fused terminal block
- Air handling available
- Supplied complete with lamps


Louvre

- LG3 Cat 2 (.200 and .500) Louvre
- Perimeter flange eliminates light spill
- Full depth profile end blade
- Positive retention – leaf springs
- Louvre material finish Clearlux specular (.200) or Softlux semi specular (.500)
- Low iridescence


Options

- Easytest – integral self test version available see page 106
- Programmable control options:
 -  Command 3
 - LIGHTmaster LM20
 - LIGHTmaster LM120

Javelin Recessed range
LG3 CAT 2 200 Cd/M²
3 x 14W T5 Lamps

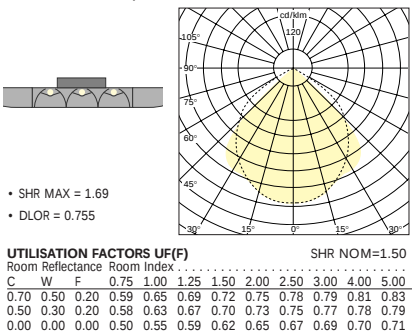

JSRW2H314

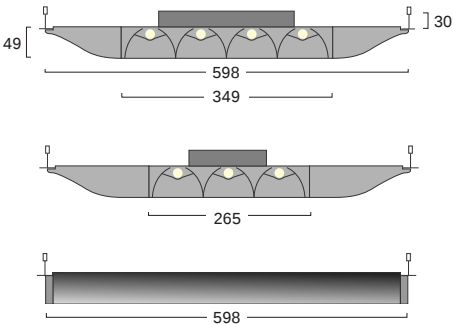

WEIGHT

LAMP WAYS	WEIGHT KG
3 x 14W T5	4.0
4 x 14W T5	4.1

Javelin Semi Recessed

ORDER CODES

SEMI-RECESSED T5 FLUORESCENT LUMINAIRE

T15 & T25 EXPOSED TEE	GEAR	LAMPS SUPPLIED	LOUVRE
JSRW2H314	High frequency	3 x 14W T5	W2.200 Specular
JSRW2H414		4 x 14W T5	
JSRW2R314	High frequency regulating	3 x 14W T5	
JSRW2R414		4 x 14W T5	W2.500 Semi-specular
JSRW5H314	High frequency	3 x 14W T5	
JSRW5H414		4 x 14W T5	
JSRW5R314	High frequency regulating	3 x 14W T5	
JSRW5R414		4 x 14W T5	

EMERGENCY Add suffix to order codes above

EMFR 3 hour fully remote emergency i.e. JSRW2H314EMFR

EASYTEST OPTION Add suffix to order codes above - for emergency versions only

/ET  Integral self autotest i.e. JSRW2H314EMFR/ET

To specify state:

Semi-recessed T5 LG3 Cat 2 luminaire with cast aluminium curved end caps and perforated side panels. Positively retained wedge louvre with full perimeter flange and full depth profile end blade. Recessed depth <30mm and protrusion below ceiling line <49mm – as Whitecroft Lighting JAVELIN SEMI-RECESSED.

