




Lighting design that complies with the revised 1996 Lighting Guide 3 requirements.



Softcell

RECESSED CAT 2/500 DIRECT/INDIRECT
1 x 55W TC-L Lamp

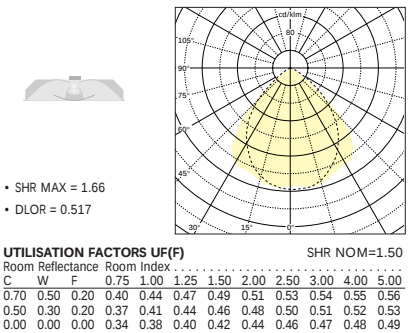

Softcell

RECESSED CAT 2/1000 DIRECT/INDIRECT
2 x 55W TC-L Lamps

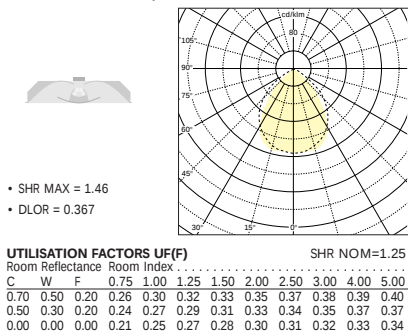

Softcell

ORDER CODES

COMPACT RECESSED ARCHITECTURAL FLUORESCENT

LUMINAIRE	LOUVRE	LAMP WAY	GEAR
SOFH155	W2.500	1 x 55W TC-L	High frequency
SOFH240	W2.1000	2 x 40W TC-L	
SOFH255	W2.1000	2 x 55W TC-L	

HIGH FREQUENCY REGULATING GEAR Substitute R for H in part code
R High frequency regulating gear i.e. SOFR155

EMERGENCY Add suffix to order codes above
EMIN Integral emergency i.e. SOFH155EMIN

EASYTEST OPTION Add suffix to order codes above
/ET Integral self autotest i.e. SOFH155EMIN/ET

To specify state:
Fully recessed compact fluorescent direct/indirect LG3 architectural luminaire with perforated opal acrylic lined gull winged for diffuse illumination and curved edge blade louvre. Linear air handling slots – as Whitecroft Lighting SOFTCELL.