

Vespère

MOTIVATION

The demand of lighting specifiers requiring a different approach to office lighting inspired the development of Vespère. Vespère adds visual interest to the ceiling plane. The micro perforated basket allows light to spill onto the ceiling and walls reducing dark ceilings and reducing contrast on the walls. Suitable for cellular offices or open plan non VDT areas.

APPLICATION

- Offices
- Reception areas
- Circulation areas
- Canteens
- Toilets
- Corridors
- Low ceiling factories

SPECIFICATION

Body

- Lamp options:
 - 1 x 40W TC-L
 - 1 x 55W TC-L
 - 2 x 40W TC-L
 - 2 x 55W TC-L
- Body compatible with Exposed Tee 25mm or 15mm
- Body fully boxed and jointed
- Body eliminates light spill
- High frequency or high frequency regulating gear standard
- Fully integral emergency versions
- Push out support tabs
- Fused terminal block
- Supplied less lamps


Options

-  Easytest – integral self test version available see page 106
- Programmable control options:
 -  Command 3
 - LIGHTmaster LM20
 - LIGHTmaster LM120

Reflectors


- Micro perforated basket
- Versions:
 - Single lamp, single suspended basket
 - Twin lamp, twin recessed baskets

Vespère single lamp semi-recessed

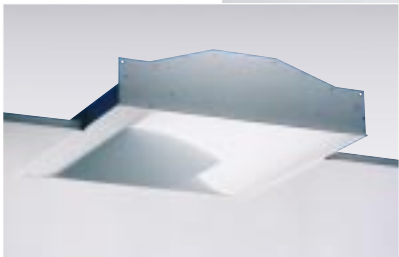


Vespère twin lamp recessed

Single lamp

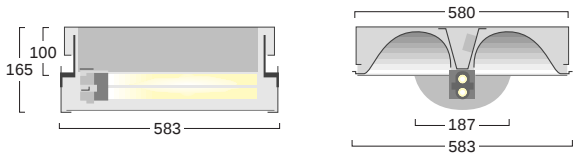

Twin lamp

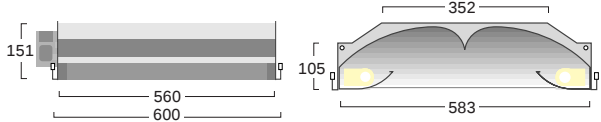

Bi-curved gull wing

Vespère

ORDER CODES

COMPACT RECESSED ARCHITECTURAL FLUORESCENT

LUMINAIRE	CEILING	LAMP WAY	GEAR
VGPT1H140	T15	1 x 40W TC-L	High frequency
VGPT1H155		1 x 55W TC-L	
VGPT2H140	T25	1 x 40W TC-L	
VGPT2H155		1 x 55W TC-L	
VGPTH240	T15 & T25	2 x 40W TC-L	
VGPTH255		2 x 55W TC-L	

HIGH FREQUENCY REGULATING GEAR Substitute R for H in part code

R High frequency regulating gear i.e. VGPTR140

EMERGENCY Add suffix to order codes above


EMIN Integral emergency i.e. VGPTH140EMIN

To specify state:

Fully recessed compact fluorescent direct/indirect gull winged architectural luminaire. Perforated basket/baskets below each lamp. Single basket protrusion not to exceed 65mm below ceiling line – as Whitecroft Lighting VESPÈRE.

Vespère

RECESSED 600 x 600 DIRECT/INDIRECT
1 x 40W TC-L Lamp

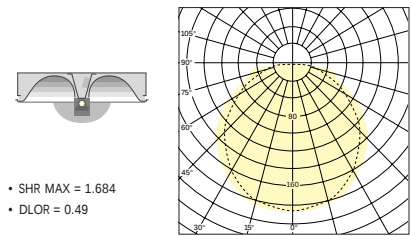

UTILISATION FACTORS UF(F)													SHR NOM=1.50
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00		
0.70	0.50	0.20	0.28	0.32	0.35	0.38	0.42	0.44	0.46	0.48	0.50		
0.50	0.30	0.20	0.24	0.28	0.31	0.34	0.38	0.40	0.42	0.45	0.46		
0.00	0.00	0.00	0.20	0.24	0.27	0.30	0.33	0.35	0.37	0.40	0.41		

CONVERSION TERMS		
Lamp wattage	40W	55W
UF and PC	1.00	0.93

WEIGHT	KG
All products	6-0

