



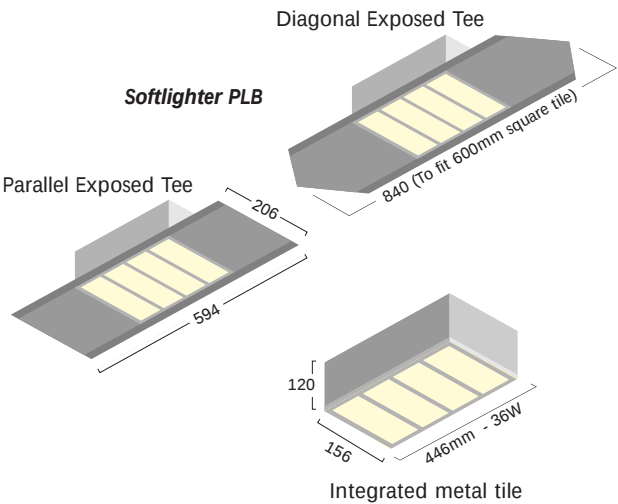

PLB: SRPLT2H136

DIMENSIONS		NOMINAL SIZES					
COMPACT	A	B	C	D	E	F	
2 x 24W TC-L	498	498	135	70	354	364	
2 x 24W TC-L	598	598	135	70	354	364	
2 x 36W TC-L	598	598	135	70	449	459	

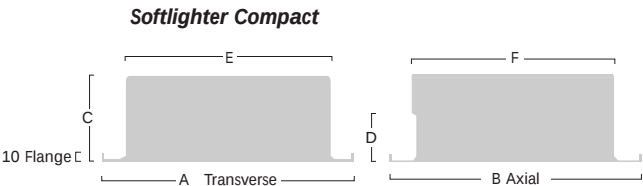

Softlighter Compact & PLB

ORDER CODES

COMPACT FLUORESCENT PERFORMANCE RECESSED LUMINAIRE

PLB	SUPPLIED LESS LAMP	LOUVRE	CEILING
SRPLT2H136	1 x 36W TC-L	W2.200 parallel	600 x 600
SRPDT2H136	1 x 36W TC-L	W2.200 diagonal	T15 or T25
SRPTT2H136	1 x 36W TC-L	W2.200	Integrated metal tile

COMPACT

SRCW2H5224	2 x 24W TC-L	W2.200	500 x 500 universal
SRCW2H5236	2 x 36W TC-L		
SRCW2H6224	2 x 24W TC-L		600 x 600 universal
SRCW2H6236	2 x 36W TC-L		
SRCW2H6240	2 x 40W TC-L		

HIGH FREQUENCY REGULATING GEAR Substitute **R** for **H** in part code

R High frequency regulating gear i.e. SRPLT2R136

EMERGENCY Add suffix to order codes above

EMIN Integral emergency i.e. SRPLT2H136EMIN

EASYTEST OPTION Add suffix to order codes above

/ET Integral self autotest i.e. SRPLT2H136EMIN/ET

To specify state:

Fully recessed LG3 Cat 2 compact fluorescent luminaire with positively retained louvre incorporating intermediate brightness zones for maximum visual comfort, universal body suitable for all ceilings – as Whitecroft Lighting SOFTLIGHTER COMPACT.

To specify state:

Fully recessed LG3 Cat 2 compact fluorescent PLB luminaire with positively retained louvre incorporating intermediate brightness zones for maximum visual comfort, diagonal/parallel mounting – as Whitecroft Lighting SOFTLIGHTER PLB.