

Cornice

MOTIVATION

Cornice offers a simple but effective method of creating concealed lighting for corridors and other areas requiring unobtrusive feature lighting. Its slim design allows easy concealment into most voids.

APPLICATION

- Cornice lighting
- Concealed lighting
- Corridors
- Lighting over entrance thresholds


SPECIFICATION

Body

- Single lamp options: 36W and 58W
- Fabricated steel construction
- White polyester powder paint finish
- Fully integral emergency options
- Switch start or high frequency control gear as standard
- Supplied less lamps

Diffuser


- Prismatic lens diffuser
- Asymmetric light distribution
- Positive retention diffuser
- Minimal dirt and bug entry

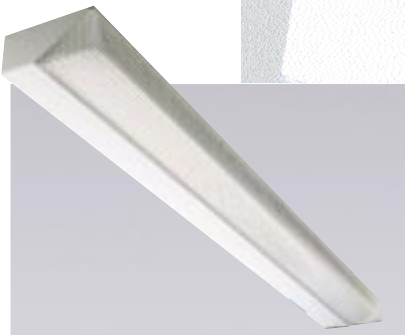


Cornice ODPS158



WEIGHT	
LAMP WAYS	WEIGHT KG
1 x 36W	5.1
1 x 58W	6.0




58W luminaire

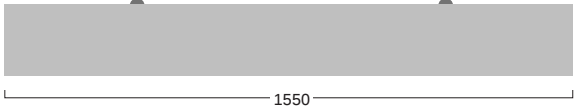

36W luminaire



Cornice
LINEAR SURFACE 1 x 1200mm PRISMATIC DIFFUSER
36W Lamp

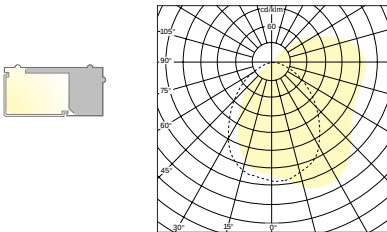

Cornice

ORDER CODES

SURFACE FLUORESCENT DIFFUSER LUMINAIRE

SWITCH START	SUPPLIED LESS LAMP	HIGH FREQUENCY
ODPS136	1 x 36W T8	ODPH136
ODPS158	1 x 58W T8	ODPH158

EMERGENCY Add suffix to order codes above

EMIN Integral 3 hour emergency i.e ODPS136EMIN