


Merlin™TM




Merlin™ 10:90
LG3 CAT 2
1 x 35W T5 Linear Fluorescent

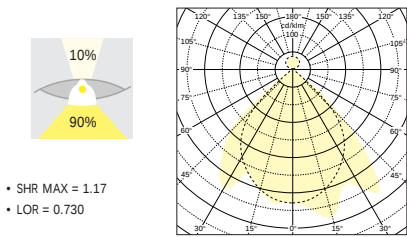

UTILISATION FACTORS UF(F) SHR NOM=1.00

Room Reflectance			Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.45	0.53	0.58	0.61	0.66	0.69	0.71	0.73	0.75	
0.50	0.30	0.20	0.43	0.50	0.55	0.58	0.62	0.65	0.67	0.69	0.70	
0.00	0.00	0.00	0.32	0.40	0.44	0.47	0.51	0.54	0.55	0.57	0.59	


Merlin™ 30:70
LG3 CAT 2
1 x 35W T5 Linear Fluorescent

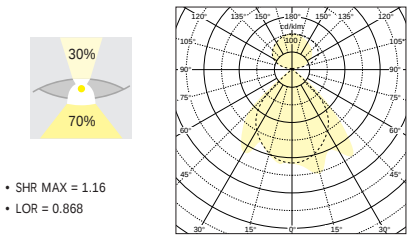

UTILISATION FACTORS UF(F) SHR NOM=1.00

Room Reflectance			Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.47	0.56	0.61	0.65	0.71	0.74	0.77	0.80	0.83	
0.50	0.30	0.20	0.43	0.51	0.55	0.59	0.63	0.66	0.68	0.71	0.72	
0.00	0.00	0.00	0.28	0.34	0.38	0.41	0.44	0.46	0.48	0.50	0.51	

Merlin™ 0:100
LG3 CAT 2
1 x 35W T5 Linear Fluorescent

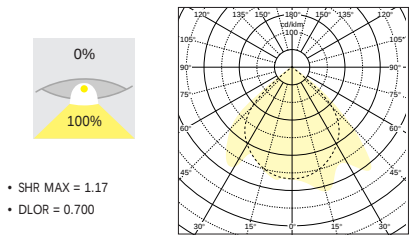

UTILISATION FACTORS UF(F) SHR NOM=1.00

Room Reflectance			Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.46	0.54	0.59	0.62	0.66	0.69	0.71	0.74	0.75	
0.50	0.30	0.20	0.44	0.52	0.57	0.60	0.64	0.67	0.69	0.71	0.72	
0.00	0.00	0.00	0.35	0.43	0.48	0.52	0.56	0.59	0.60	0.63	0.64	

