





Anti-glare cylinder



Indirect lighting component



Ergo, for exterior use. See p206

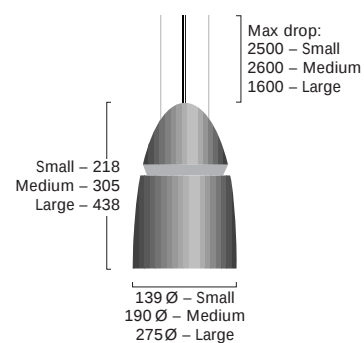

WEIGHT

WEIGHT KG

Small	1.6
Medium	2.4 - 3.2
Large	3.2 - 5.2

Ergo

ORDER CODES

IP20 & IP65 PENDANT LUMINAIRE

IP20 SMALL - 139MM Ø

SUPPLIED LESS LAMP

EGS14F13	1 x 13W TC-T	Integral gear
EGS14T50	1 x 50W QT12*	

IP65 MEDIUM - 190MM Ø

EGS19F26	1 x 26W TC-T	Integral gear
----------	--------------	---------------

IP65 LARGE - 275MM Ø

EGS28C70	1 x 70W CDM-T	Integral gear
EGS28C150	1 x 150W CDM-T	
EGS28F42	1 x 42W TC-T**	

* Transformer incorporated

** Lamp base GX24q-4

To specify state:

Suspended architectural lantern with cast aluminium gear enclosure and feature decorative back light component with anti-glare cylinder. Small <139mm Ø/medium <190mm Ø/large <275mm Ø design.

IP20 (small)/IP65 (medium and Large) – as Whitecroft Lighting ERGO.