

Flight

MOTIVATION

WALL MOUNTED
Designed to offer a flexible solution for a variety of office lighting scenarios the Flight range combines stylish aesthetics with a robust build quality. The controlled direct/indirect light distribution washes the wall and adds interest to any space.

FREE STANDING
Designed to match with the wall mounted version, free standing Flight can be used in the centre of open plan areas linking the aesthetic to the wall mounted lighting. Alternatively the design is so distinctive Flight can be used on its own for smaller installations.

APPLICATION

- Offices
- Banks
- Design studios
- Conference rooms
- Board rooms
- Circulation areas
- Reception areas

SPECIFICATION


- Lamp options:
 - 2 x 36W TC-L
 - 2 x 40W TC-L
 - 2 x 55W TC-L
 - 3 x 55W TC-L
 - 4 x 55W TC-L
- Wall Mounting – screw fix

- Lamp options:
 - 4 x 55W TC-L
- Twin switching for 50% or 100% light output
- Freestanding design


Wall mounted and Free standing

- Body: Extruded aluminium and fabricated steel construction
- Finish: Matt metallic grey
- High frequency gear standard
- 85% uplight
- 15% downlight
- Downlight controller white perforated steel
- Supplied less lamps

FLTF4369H




FLTW2559H




FLTW4559H



Flight
Wall Mounted
2 x 55W TC-L Compact Fluorescent

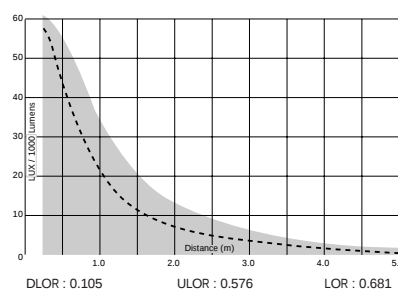


Flight
Free Standing
4 x 55W TC-L Compact Fluorescent

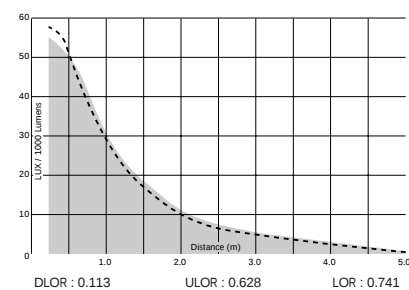



Barclays Bank,
Fleet Street, London

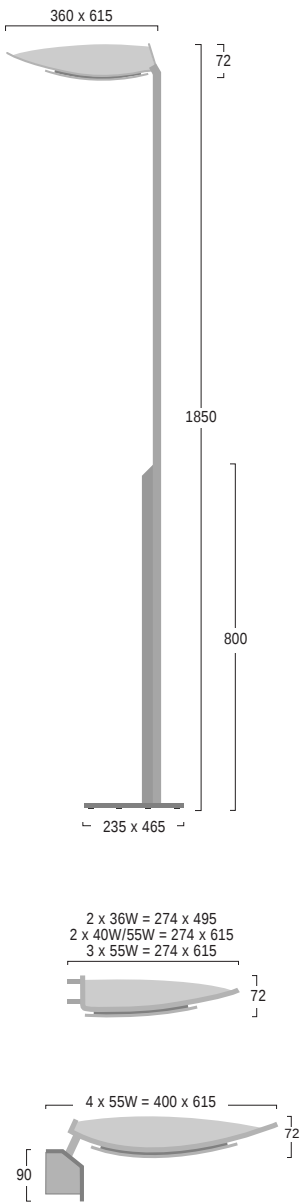


Wall mounted Flight,
Abbey National plc, Chichester



CUSTOMISED SPECIAL

- The Flight Uplighter shown in this illustration has been converted to mount on a vertical gear housing, displaying Whitecroft's ability to customise products which meet the specific needs of its clients.



Flight Wall Mounted & Free Standing

ORDER CODES

INDIRECT ARCHITECTURAL LIGHTING

WALL MOUNTED	GEAR	SUPPLIED LESS LAMP
FLTW2369H	High frequency	2 x 36W TC-L
FLTW2409H		2 x 40W TC-L
FLTW2559H		2 x 55W TC-L
FLTW3559H		3 x 55W TC-L
FLTW4559H		4 x 55W TC-L

FREE STANDING

FLTF4559H	High frequency	4 x 55W TC-L
-----------	----------------	--------------

To specify state:
Wall mounted uplighter extruded aluminium and fabricated steel.
<72mm in depth. 85% uplight component and 15% downlight –
as Whitecroft Lighting FLIGHT WALL MOUNTED.

To specify state:
Free standing uplighter with extruded aluminium and fabricated steel
construction head <72mm in depth. 85% uplight component and
15% downlight – as Whitecroft Lighting FLIGHT FREE STANDING