

Oasis® Wall Mounted

MOTIVATION

The wall mounted version of Oasis® was designed to complement and enhance the suspended Oasis® range found on pages 74-76. The Oasis® family provides the lighting designer with a method of running a continuous lighting aesthetic throughout a space.

APPLICATION

- Offices
- Design studios
- Conference rooms
- Board rooms
- Circulation areas
- Reception areas

SPECIFICATION


- Lamp options:
 - 1 x 34W TC-L
 - 1 x 40W TC-L
 - 1 x 55W TC-L
- Body: Extruded aluminium
- End caps: Die cast aluminium
- Wall mounting: Screw fix cast aluminium bracket
- Finish: White polyester powder paint RAL9010 20% gloss
- High frequency gear
- Individual switch incorporated into wall bracket
- Integral 3 hour emergency option
- Supplied less lamps

Louvre

- Downward light via LG3 Cat 2 (.200) louvre
- Specular curved wedge
- Positive retention via quick release springs
- Asymmetric distribution
- Upward light controlled by extruded acrylic lens



For Oasis® suspended see p74-76

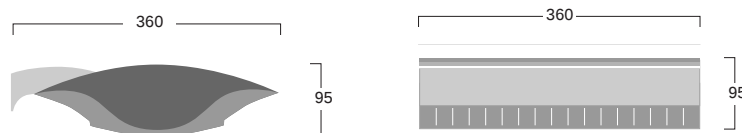

Oasis® Wall Mounted

ORDER CODES

DIRECT/INDIRECT ARCHITECTURAL LIGHTING

STANDARD	SUPPLIED LESS LAMP	GEAR
OAGW2H134	1 x 34W TC-L	High frequency
OAGW2H140	1 x 40W TC-L	
OAGW2H155	1 x 55W TC-L	

EMERGENCY Add suffix to order codes above

EMIN 3 hour maintained fully integral emergency

To specify state:

Wall mounted direct/indirect luminaire extruded aluminium body <95mm in depth acrylic lens for upward light component curved wedge LG3 CAT 2 Louvre with asymmetric distribution – as Whitecroft Lighting OASIS® WALL MOUNTED.

Oasis®
Asymmetric Wall Mounted
1 x 55W TC-L Compact Fluorescent

