

Slice

MOTIVATION

To produce an ultra low profile surface or semi-recessed emergency luminaire with unique clip together gear tray and reflector assembly, designed for either downlighting used as an exit sign or with the downlighting aperture closed for ceiling mount applications.

APPLICATION

- Wall or ceiling mount
- Areas with low ceiling heights
- Prestigious locations
- Reception areas
- Hotel corridors
- Exit routes

SPECIFICATION

- Viewing distance up to 22m
- Low tack self adhesive legends – specify separately see page 117
- IP42 protection
- 3 hour maintained or non-maintained versions
- ABS flame retardant body
- Rear 20mm conduit entry
- Polycarbonate clear diffuser
- Simple ‘first fix’ housing
- Plug in gear tray/reflector unit
- Clip together installation
- Housing and diffuser meet 850°C hot wire test
- Surface mount or semi recessed design in one body
- Supplied with lamp
-  Integral self test version available see page 106




CUT/NM/F8/W



Slice with low tack self adhesive Legend, see page 117 to order



Ultra slim profile

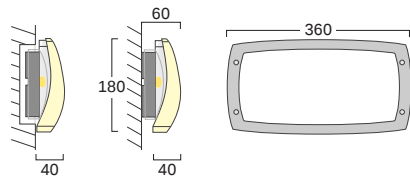

FEATURES

	CUT/NM/F8/W	CUT/M/F8/W
MODE	Non-maintained	Maintained
DURATION	3 hours	3 hours
NORMAL LAMP OUTPUT	–	480lm
EMERGENCY LAMP OUTPUT	180lm	180lm
INPUT VOLTAGE	220/240V 50Hz	
RATING	8VA	20VA
BATTERY TYPE	High temperature Nickel Cadmium 3.6V 4Ah	
RECHARGE TIME	24 hours	24 hours

Slice

ORDER CODES

ULTRA LOW PROFILE EMERGENCY BULKHEAD

EMERGENCY UNIT	EMERGENCY LIGHTING	LAMP SUPPLIED
CUT/NM/F8/W	3 hour non-maintained	1 x 8W T5
CUT/M/F8/W	3 hour maintained	1 x 8W T5

EASYTEST OPTION Add suffix to order codes above after colour option

/ET  Integral self autotest

RECESSING KIT Order separately

CUT/RK Recessing kit

LOW TACK SELF ADHESIVE LEGENDS Order separately

See page 117 to specify

To specify state:
Surface/semi recessed 8W T5 3 hour maintained/non-maintained emergency bulkhead/exit sign. Plug in gear tray/reflector unit. Curved front protrusion into room <40mm. IP42 – as Whitecroft Lighting SLICE.