

Slot

MOTIVATION

Slot has been developed for areas where blade exit signs are required but a minimal protrusion into the space or unobtrusive design is the key element. Slot's fully recessed body allows just the exit panel to enter the space below and solves the problem.

APPLICATION

- Exit doors: interior
- Public areas
- Offices
- Hotels
- Corridors
- Low ceiling height areas

SPECIFICATION


- Viewing distances up to 36m
- Exit panels – specify separately, see page 117
- Recessing kit supplied
- White powder coated steel housing
- Recessed body 78mm depth
- Ceiling cut dimensions 480mm x 85mm
- Other colours available to special order
- 2 x 20mm Ø conduit entries or rear surface
- Additional entries on each end face
- Weight 3.0kg
- Max ambient temp 30°C
- Slide out legend panel to access internals
- IP42 protection
- Mains, 3 hour maintained or non-maintained versions
- Supplied with lamp
-  Integral self test version available see page 106



SLOT/NM/F8 with Legend panel, see page 117 to order



Flange detail

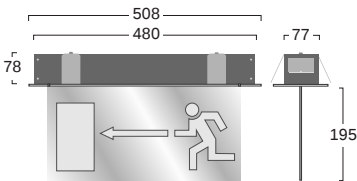

FEATURES

	SLOT/NM/F8	SLOT/M/F8	SLOT/F8
MODE	Non-maintained	Maintained	Mains
DURATION	3 hours	3 hours	–
NORMAL LAMP OUTPUT	–	480lm	480lm
EMERGENCY LAMP OUTPUT	180lm	180lm	180lm
INPUT VOLTAGE	220/240V 50Hz		
RATING	8VA	20VA	16VA
BATTERY TYPE	High temperature Nickel Cadmium 3.6V 4Ah		
RECHARGE TIME	24 hours	24 hours	–

Slot

ORDER CODES

CEILING RECESSED EMERGENCY EXIT SIGN

EMERGENCY UNIT	EMERGENCY LIGHTING	LAMP SUPPLIED
SLOT/NM/F8	3 hour non-maintained	1 x 8W T5
SLOT/M/F8	3 hour maintained	1 x 8W T5
SLOT/F8	Mains voltage	1 x 8W T5

EASYTEST OPTIONS Add suffix to order codes above

/ET  Integral self autotest

LEGEND PANELS Order separately

See page 117 to specify

To specify state:
Semi recessed exit sign 8W T5 mains/3 hour maintained/
non-maintained emergency. Protrusion below ceiling <195mm.
Recess into ceiling void <78mm. IP42 – as Whitecroft Lighting SLOT.