

Downlights: Vertically mounted compact fluorescent downlighters

Mirage MD15

MOTIVATION

Mirage MD15 has been developed to fulfil the need for a lower level of light and small bezel diameter.

APPLICATION

- Toilets
- Corridors
- Retail

SPECIFICATION

- Lamp – Single 13W TC-D vertically mounted
- Body – pressed steel construction
- Gear – integral to body, switch start or high frequency
- Reflectors – silver LG3 Cat 3
- Bezel – white paint finish RAL9010 20% gloss
- Ceiling retention by spring mechanism
- Minimum ceiling void depth 250mm
- For ceiling thickness – 1mm to 25mm
- Without power factor correction
- Supplied with lamps – 3000K TC-D

Options

- Emergency versions (remote box)




MD15-113S



Mirage MD15
LG3 CAT 3 SILVER REFLECTOR
1 x 13W TC-D Compact fluorescent


Angle 84°

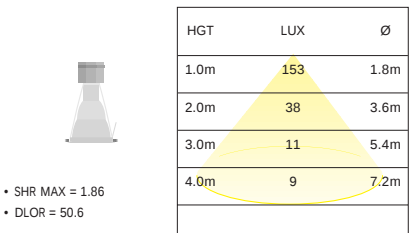

- SHR MAX = 1.86
- DLOR = 50.6

UTILISATION FACTORS UF(F)												
Room Reflectance Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	N/A	0.42	0.45	0.47	0.50	0.51	0.53	0.54	0.55	
0.50	0.30	0.20	N/A	0.39	0.42	0.44	0.47	0.48	0.49	0.51	0.52	
0.00	0.00	0.00	N/A	0.36	0.38	0.40	0.43	0.44	0.45	0.47	0.47	

SHR NOM 1.75



Mirage MD15

ORDER CODES

COMPACT FLUORESCENT DOWNLIGHTERS

LUMINAIRE	GEAR	LAMP SUPPLIED
MD15-113S	Switchstart	1 x 13W TC-D
MD15-113SH	High frequency	

EMERGENCY Add suffix to order codes above

E3 Emergency pack

Note: Plain silver reflector as standard

To specify state:
Recessed compact fluorescent downlight with vertically mounted lamp. Pressed steel body with integral control gear LG3 Cat 2 reflector. Bezel Ø <146mm – as Whitecroft Lighting MIRAGE MD15.