

Torque




REDIRECTION

TNS-C70-LS1-13


WEIGHT AND DIMENSIONS

VERSION	LAMP	WEIGHT FITTING KG	WEIGHT GEARBOX KG	TOTAL WEIGHT KG	GEARBOX DIMENSION A
TNS-TC35E-	35W CDM-TC	1.3	–	1.3	–
TNS-C70-	70W CDM-T	1.3	2.4	3.7	215
TNS-C15-	150W CDM-T	1.3	3.7	5.0	290
TNS-T75-	75W LV TH	1.2	–	1.2	–
TNS-T10-	100W LV TH	1.2	–	1.2	–



TNS-T
75-100W LV
Tungsten Halogen
Integral transformer

TNS-TC35E
35W CDM-TC
Integral electronic gear

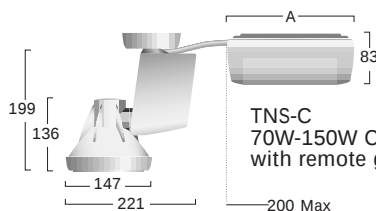

TNS-C
70W-150W CDM-T
with remote gear box

Torque Spotlight

ORDER CODES

SURFACE OR TRACK MOUNTED SPOTLIGHT

11° REFLECTOR	20° REFLECTOR	40° REFLECTOR	COLOUR	LAMP SUPPLIED	BASE
TNS-TC35E-#-11	TNS-TC35E-#-12	TNS-TC35E-#-13	Silver	35W CDM-TC Integral gear	G8.5
TNS-TC35E-#-21	TNS-TC35E-#-22	TNS-TC35E-#-23	White		
TNS-TC35E-#-31	TNS-TC35E-#-32	TNS-TC35E-#-33	Black		
TNS-C70-#-11	TNS-C70-#-12	TNS-C70-#-13	Silver	70W CDM-T Remote gear	G12
TNS-C70-#-21	TNS-C70-#-22	TNS-C70-#-23	White		
TNS-C70-#-31	TNS-C70-#-32	TNS-C70-#-33	Black		
TNS-C15-#-11	TNS-C15-#-12	TNS-C15-#-13	Silver	150W CDM-T Remote gear	GY6.35
TNS-C15-#-21	TNS-C15-#-22	TNS-C15-#-23	White		
TNS-C15-#-31	TNS-C15-#-32	TNS-C15-#-33	Black		
TNS-T75-#-11	TNS-T75-#-12	TNS-T75-#-13	Silver	75W LV Tungsten Halogen Integral transformer	GY6.35
TNS-T75-#-21	TNS-T75-#-22	TNS-T75-#-23	White		
TNS-T75-#-31	TNS-T75-#-32	TNS-T75-#-33	Black		
TNS-T10-#-11	TNS-T10-#-12	TNS-T10-#-13	Silver	100W LV Tungsten Halogen Integral transformer	GY6.35
TNS-T10-#-21	TNS-T10-#-22	TNS-T10-#-23	White		
TNS-T10-#-31	TNS-T10-#-32	TNS-T10-#-33	Black		

MOUNTING OPTIONS Replace # in code above with suffix below – see pages 172-173 for track information

DM	Direct M e.g. TNS-C15-DM-11	LS1	Concord® Lytespan® 1 e.g. TNS-C15-LS1-11
M3	3 circuit e.g. TNS-C15-M3-11	SM	Surface mounted e.g. TNS-C15-SM-11

To specify state:

Surface/track mounted mains voltage spotlight CDM-T/CDM-TC/TH LV lamp with integral/remote gear integral transformer. Die cast aluminium construction with aiming scale and fin feature. Narrow 11° / medium 20°/wide 40° reflector. 355° rotation and 180° tilt, to protrude <199mm from the ceiling line – as Whitecroft Lighting TORQUE.

Torque TH Spotlight

Low Voltage Capsule Spot

Angle 11°



	LUX			
HGT	35W	150W	Ø	
1.0m	36068	52900	0.19m	
2.0m	9017	13225	0.39m	
3.0m	4008	5878	0.58m	
4.0m	2254	3306	0.77m	

Torque CDM Spotlight

Medium

Angle 20°



	LUX			
HGT	35W	70W	150W	Ø
1.0m	21681	43362	94419	0.28m
2.0m	5240	10840	23605	0.56m
3.0m	2409	4818	10491	0.84m
4.0m	1355	2710	5902	1.12m

Torque CDM Spotlight

Flood

Angle 40°



	LUX			
HGT	35W	70W	150W	Ø
1.0m	6454	12908	28107	0.54m
2.0m	1614	3227	7027	1.07m
3.0m	717	1434	3123	1.61m
4.0m	403	806	1756	2.14m

For track see p172