

Spotlights: Surface or track mounted spotlight and wallwasher

Torque Wallwasher

MOTIVATION

Designed for areas where excellent vertical illumination and aesthetics are of key importance. The wall washing version of Torque can be surface or track mounted and uses the latest compact fluorescent lamp technology to achieve a smoothly graduated wallwash.

APPLICATION

- Retail**
 - Retail
 - Vertical shelving
 - Vertical displays
 - Signage
 - Wall texture
- Commercial**
 - Museums and galleries
 - Pictures
 - Wall hangings
 - Signage
 - Vertical features
 - Wall texture

SPECIFICATION

- Lamp options:
 - 26W TC-T
 - 42W TC-T
- Body:
 - Precision die cast aluminium
 - Silver, white or black finish
- Gear:
 - Integral to body
- Rotation 355°
- Tilt 180°
- Integrated aiming scale
- Mounting:
 - Surface
 - Track:
 - Direct M
 - Concord®
 - Lytespan® 1
 - 3 circuit
- IP20 protection
- F-mark compliance
- Supplied with lamp


TNW-T42-M3-2



REDIRECTION



For track see p172

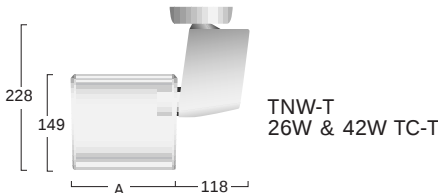

TNW-T
26W & 42W TC-T

Torque Wallwasher

ORDER CODES

SURFACE OR TRACK MOUNTED WALLWASHER

ASYMMETRIC REFLECTOR	COLOUR	LAMP SUPPLIED	BASE
TNW-T26-#-1	Silver	26W TC-T	GX24q1
TNW-T26-#-2	White		
TNW-T26-#-3	Black		
TNW-T42-#-1	Silver	42W TC-T	
TNW-T42-#-2	White		
TNW-T42-#-3	Black		

MOUNTING OPTIONS Replace # in code above with suffix below – see page 172-173 for track information

- DM Direct M e.g. TNS-C15-DM-11
- LS1 Concord® Lytespan® 1 e.g. TNS-C15-LS1-11
- M3 3 circuit e.g. TNS-C15-M3-11
- SM Surface mounted e.g. TNS-C15-SM-11

WEIGHT AND DIMENSIONS

VERSION	LAMP	TOTAL WEIGHT KG	DIMENSION A
TNW-T26-	26W TC-T	1.3	180
TNW-T42-	42W TC-T	1.4	200

To specify state:
Surface/track mounted mains voltage compact fluorescent TC-T wallwasher with integral gear. Die cast aluminium construction with aiming scale. 355° rotation and 180° tilt, to protrude <228mm from the ceiling line – as Whitecroft Lighting TORQUE wallwasher.