




LAMP COMPARISON

	250W		400W	
	VENTURE LAMP	TYPICAL EUROPEAN LAMP	VENTURE LAMP	TYPICAL EUROPEAN LAMP
Initial lumens	23,800	18,000	40,000	38,000
2000 hrs lumens	22,000	17,000	38,000	29,000
Lamp life hrs	15,000	15,000	20,000	20,000

Vertical burning lamps

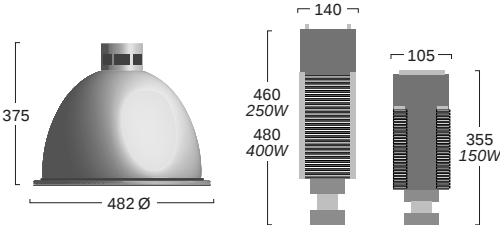

FEATURES

LAMP WAYS	POWER FACTOR	LINE CURRANT	TOTAL WATTS	Ta °C	WEIGHT KG
150W SON	>0.85	0.83	168	45	6.4
250W SON	>0.90	1.30	280	45	7.8
400W SON	>0.85	2.20	440	45	8.9
250W HQI-E	>0.90	1.30	280	45	7.8
400W HQI-E	>0.80	1.90	415	45	9.5
250W MBF-U	>0.85	1.30	275	45	6.7
400W MBF-U	>0.85	2.10	425	45	7.6

Hibay Series 2

ORDER CODES

INDUSTRIAL HIGH BAY LUMINAIRE	
LUMINAIRES	LAMP SUPPLIED
B2150S/HBR	150W SON-T
B2250S/HBR	250W SON-T
B2400S/HBR	400W SON-T
B2250H/HBR	250W HQI-E#
B2400H/HBR	400W HQI-E#
B2250M/HBR	250W MBF-U
B2400M/HBR	400W MBF-U

VISOR OPTION Please order separately

B2GL Glass visor assembly

#Must be used with HRGL fitted to ensure safety in event of non-quiescent lamp failure

To specify state:

Rigid steel high bay luminaire with spun, self cleaning aluminium reflector delivering up to 78% DLOR. SON/ MBF/high output Venture HQI-E lamp. Easy access to integral control gear. Ambient temperature +45°C. IP22 – as Whitecroft Lighting HIBAY SERIES 2.