

# Visionary 2310

## MOTIVATION

Visionary 2310 has been designed to appeal to the modern lighting designer with its contemporary styling. Careful design of the louvre has reduced light pollution.

## APPLICATION

- Parking areas
- Retail parks
- Walkways
- Shopping areas
- Pedestrian areas

## SPECIFICATION

- High pressure sodium or compact fluorescent lamps
- IP65 protection
- Post top 76mm Ø spigot mounting
- Die-cast aluminium base
- Tough polycarbonate cylindrical housing
- GRP top and canopy
- Removable top for lamp changing
- Black polyester powder paint finish
- Internal louvre and combined gear compartment
- Integral photocell option
- Supplied with lamp


For column mounting arrangements and accessories see pages 231-233

V23100070S




## Visionary 2310

1 x 70W SON

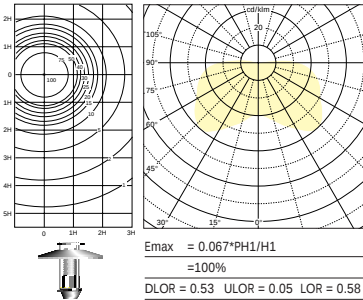

## WEIGHT AND WINDAGE

|         | WEIGHT<br>KG | WINDAGE<br>M <sup>2</sup> |
|---------|--------------|---------------------------|
| 1 x 50W | 8.5          | 0.12                      |
| 1 x 70W |              |                           |
| 2 x 24W |              |                           |

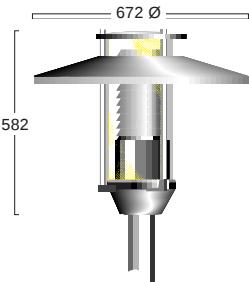

## Visionary 2310

## ORDER CODES

LIGHTING FOR OPEN SPACES

| LUMINAIRE    | LAMP SUPPLIED |
|--------------|---------------|
| V23100050S   | 50W SON       |
| V23100070S   | 70W SON       |
| V23102024F   | 2 x 24W TC-L  |
| V23100050SPC | 50W SON       |
| V23100070SPC | 70W SON       |
| V23102024FPC | 2 x 24W TC-L  |

PC = Integral photocell

## MOUNTING ACCESSORIES

Replace ## with column top Ø (mm), see pages 231-233

|         |                      |
|---------|----------------------|
| V2 / ## | 2 way column bracket |
|---------|----------------------|

## To specify state:

Amenity luminaire with GRP canopy and cast aluminium base. 50/70W SON 2 x 24W TC-L lamp. Internal louvre. IP65 – as Whitecroft Lighting VISIONARY 2310.