





CENS18GS

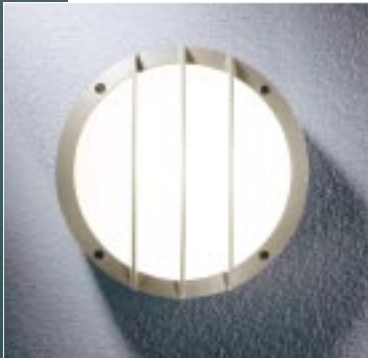

CENS18GB

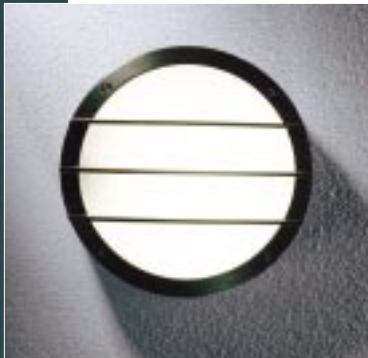


CENS18GB


Centurion 265
1 x 26W TC-D



- ULOR = 0.120
- DLOR = 0.120



UTILISATION FACTORS UF(F)			SHR NOM 2.50									
Room Reflectance	Room Index		0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	N/A	N/A	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
0.00	0.00	0.00	N/A	0.34	0.37	0.39	0.42	0.43	0.45	0.46	0.47	

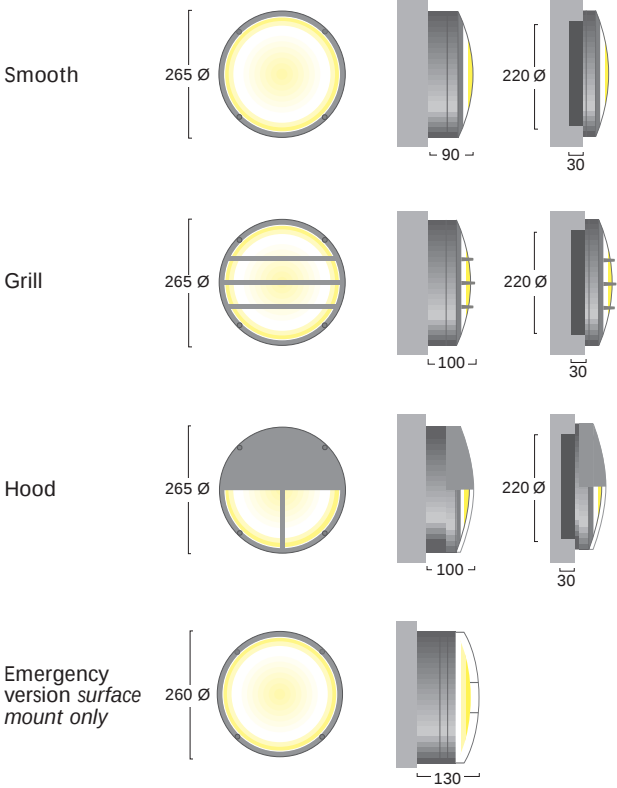

Centurion 265

ORDER CODES
IP55 WALL OR CEILING MOUNTED BULKHEAD

FRONT	SURFACE MOUNTED	LAMP SUPPLIED	COLOUR	SEMI RECESSED
	CENS18SB	1 x 18W TC-D	Black	CENR18SB
	CENS26SB	1 x 26W TC-D		CENR26SB
	CENS18GB	1 x 18W TC-D		CENR18GB
	CENS26GB	1 x 26W TC-D		CENR26GB
	CENS18HB	1 x 18W TC-D		CENR18HB
	CENS26HB	1 x 26W TC-D		CENR26HB

COLOUR OPTIONS For Silver version substitute B for S
S Silver e.g. CENS18GS

EMERGENCY Add suffix after colour suffix on order codes above
EM Integral 3 hour maintained emergency –
Surface mounted options only e.g. CENS18SBEM

To specify state:
Circular surface semi-recessed cast aluminium bulkhead with 18/26W TC-D lamp.
Smooth/grill/hood front design. Opal polycarbonate diffuser – IP55 as Whitecroft
Lighting CENTURION 265.