

Ergo

MOTIVATION

To create a contemporary lantern design for exterior or interior use. Ergo offers flexible aiming with a wide selection of lamp options.

APPLICATION

- Atriums
- Walkways
- Building exteriors
- Feature uplighting (interior applications only)

SPECIFICATION

- Die cast aluminium and thermoplastic construction
- Reflector aluminum silver anodised
- Anti glare cylinder
- Integral control gear
- Dust tight and water jet proof
- Lamp replacement without tools
- IP65 ingress protection
- Supplied less lamp




EGW19F26



Ergo Medium
1 x 26W TC-T Lamp



- SHR MAX = 0.902
- DLOR = 0.34




UTILISATION FACTORS UF(F)		SHR NOM 0.75											
Room Reflectance		Room Index											
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00		
0.70	0.50	0.20	0.24	0.27	0.29	0.30	0.32	0.33	0.34	0.35	0.36		
0.50	0.30	0.20	0.21	0.24	0.26	0.27	0.29	0.30	0.31	0.32	0.33		
0.00	0.00	0.00	0.19	0.21	0.23	0.24	0.26	0.27	0.27	0.28	0.29		

CONVERSION TERMS

Lamp wattage	18W
UF&PC	1.05




EGW19F26



Indirect lighting component




Anti-glare cylinder

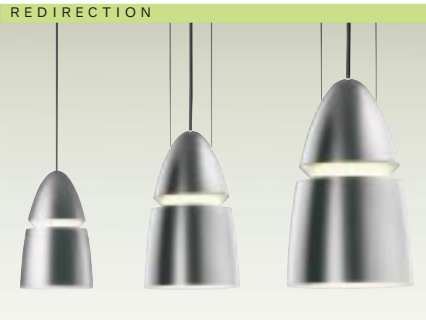


REDIRECTION

Ergo Pendant, for interior use. See p86

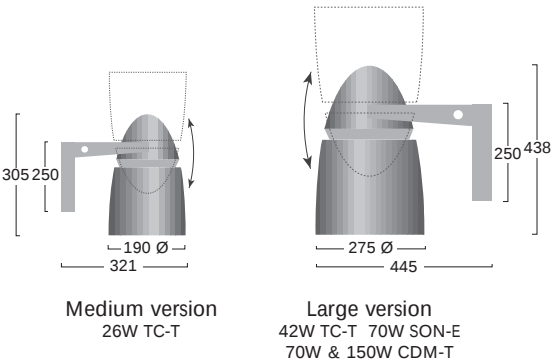

Ergo Large
1 x 70W CDM-T Lamp

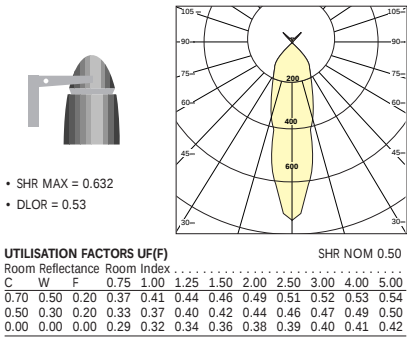

Ergo

ORDER CODES

IP65 WALL MOUNTED LUMINAIRE

MEDIUM 190 Ø	SUPPLIED LESS LAMP	LARGE 275 Ø
EGW19F26	1 x 26W TC-T	—
—	1 x 70W SON-E	EGW28S70
—	1 x 42W TC-TEL	EGW28F42
—	1 x 70W CDM-T	EGW28C70
—	1 x 150W CDM-T	EGW28C150

To specify state:
Directionally adjustable wall mounted lantern with cast aluminium gear enclosure. 26/42W TC-T/70/150W CDM lamp. Decorative back light component and anti-glare cylinder – IP65 as Whitecroft Lighting ERGO.