

Surface: IP65 exterior downlighter and up-downlighter

Spectre

MOTIVATION

To reflect the design trend towards reworked 70s retro accents in a range of direct or direct-indirect lighting.

APPLICATION

- Cinemas
- Shopping malls
- Hotels
- Retail parks

SPECIFICATION

- Housing die cast aluminium
- Die cast aluminium insert wall bracket
- Reflector aluminum silver anodised
- Integral control gear
- Dust tight and water jet proof
- Duroplastic insert and cover
- IP65 ingress protection
- Supplied less lamp





SPW18F226W




Spectre 200 recessed under canopy lighting. See p142

Designer Outlet Village Ashford

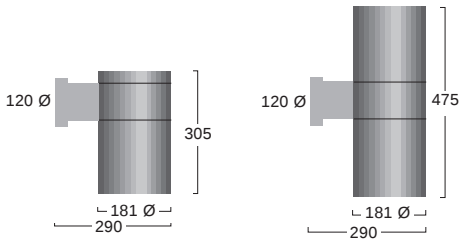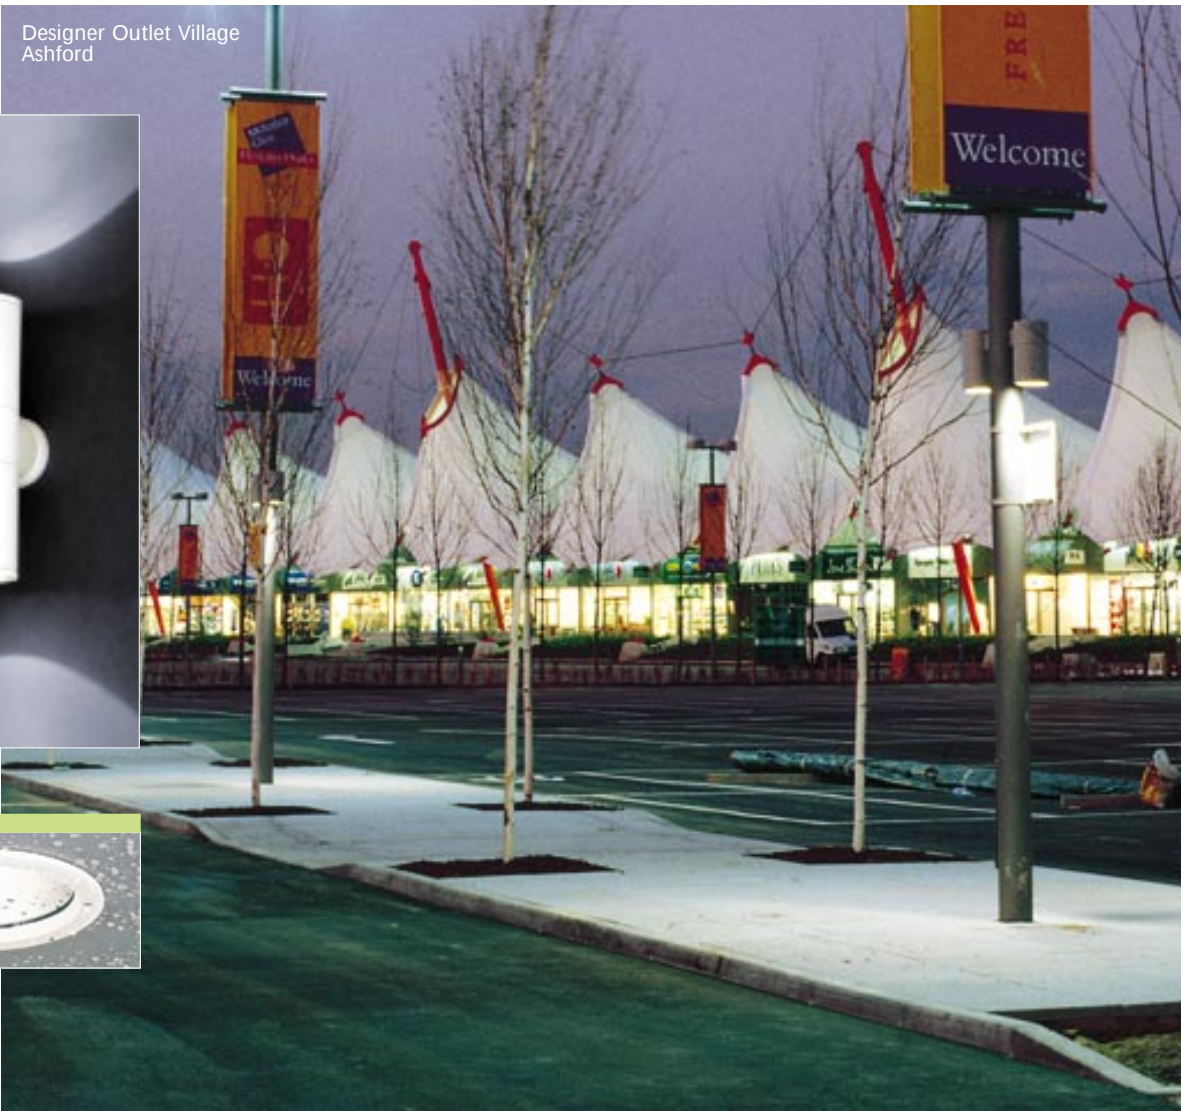

Spectre

1 x 70W CDM-T Lamp

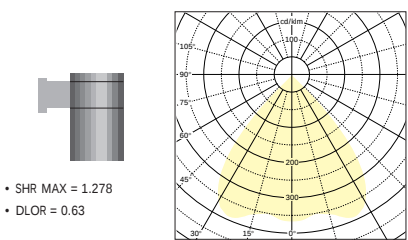


- SHR MAX = 1.278
- DLOR = 0.63

UTILISATION FACTORS UF(F)												
Room Reflectance Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.49	0.54	0.57	0.59	0.62	0.64	0.66	0.67	0.68	
0.50	0.30	0.20	0.45	0.50	0.53	0.56	0.59	0.61	0.62	0.64	0.65	
0.00	0.00	0.00	0.42	0.46	0.49	0.51	0.54	0.56	0.57	0.58	0.59	

Spectre

2 x 26W TC-D

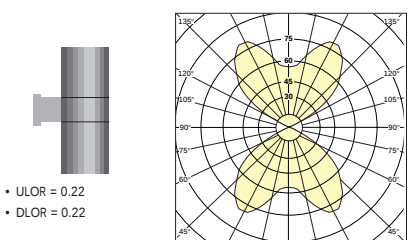

- ULOR = 0.22
- DLOR = 0.22

UTILISATION FACTORS UF(F)												
Room Reflectance Room Index												
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	N/A	0.34	0.36	0.39	0.41	0.43	0.44	0.46	0.47	
0.50	0.50	0.20	N/A	0.30	0.33	0.35	0.38	0.40	0.41	0.43	0.44	
0.00	0.00	0.00	N/A	0.27	0.30	0.32	0.35	0.36	0.37	0.39	0.40	

Spectre

ORDER CODES

IP65 EXTERIOR DOWNLIGHTER AND UP DOWNLIGHTER

DOWN	COLOUR	SUPPLIED LESS LAMP	UP-DOWN
SPW18F18B	Black	1 x 18W TC-T x 2	SPW18F218B
SPW18F26B		1 x 26W TC-T x 2	SPW18F226B
SPW18C35B		1 x 35W CDM-T	—
SPW18C70B		1 x 70W CDM-T	—

Note: TC-T version only suitable for Osram lamps

OPTIONS For White version substitute W for B

W White e.g. SPW18F18W

To specify state:
Wall mounted cylindrical down/up-down light cast aluminium construction. 1st fix cast mounting plate, 18/26W TC-T, 35/70W CDM-T lamps – IP65 as Whitecroft Lighting SPECTRE.