

Surface: 2D mains and emergency range

G-Line

MOTIVATION

To offer an exterior rated IP65, 2D wall or ceiling mounted bulkhead with prismatic diffuser for good light output and screw fix construction to improve vandal resistance.

APPLICATION

- Security lighting
- Toilets and shower areas
- Stairwells
- Emergency exit doors
- Walkways and paths

SPECIFICATION


- Lamp options: 28W 2D
- IP65 protection
- Switch start or high frequency gear
- 28W mains or emergency
- Body: Injection moulded ABS
- Diffuser: Prismatic polycarbonate
- Stainless steel fixing screws
- Supplied with lamp




G-Line
1 x 28W 2D Lamp



- SHR MAX = 1.55
- ULOR = 0.068
- DLOR = 0.508



UTILISATION FACTORS UF(F)												
Room Reflectance			Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.28	0.33	0.37	0.40	0.44	0.47	0.49	0.52	0.54	
0.50	0.30	0.20	0.22	0.27	0.31	0.34	0.38	0.41	0.43	0.46	0.48	
0.00	0.00	0.00	0.17	0.20	0.24	0.26	0.30	0.33	0.35	0.37	0.39	

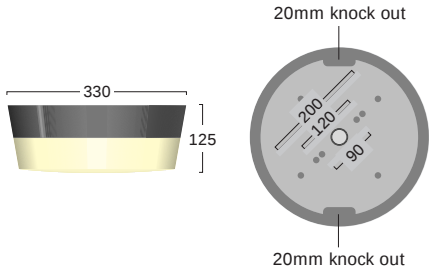

G-Line

ORDER CODES
2D MAINS AND EMERGENCY RANGE

HIGH FREQUENCY	LAMP SUPPLIED	MODE	SWITCHSTART
GLN/HFG/2D28	1 X 28W 2D	Mains	GLN/SS/2D28
GLN/HFG/2D28/EMIN	1 X 28W 2D	Integral 3 hour emergency	

To specify state:
Surface mounted IP65 28W 2D bulkhead. ABS body, prismatic polycarbonate diffuser, with stainless steel fixing screws – as Whitecroft Lighting G-LINE.