

Marine Low Voltage

MOTIVATION

Utilising low voltage dichroic reflector lamps the compact styling of low voltage Marine belies its tough construction. The body and bezel are constructed using cast 316 stainless steel.

APPLICATION

- Fountains
- Ponds
- Pools
- Showers
- Gardens
- Drives
- Walkways
- Areas subject to total immersion or moisture exposure

SPECIFICATION


- Protected to IP68 to a depth of 1.5 metres
- Surface mounted version supplied with multi-directional fixing bracket
- Recessed version supplied with sprung fixing arms. Cut out to 80mm Ø
- Supplied complete with 2000mm of specially developed cable to resist UV degradation and weathering
- Frosted or coloured tempered glass lens options
- For use with 50mm low voltage dichroic lamps, 20, 35, 50 and 65W
- 50W maximum when used out of water, 65W maximum when used below water
- Supplied without lamp



WET/R



WET/S

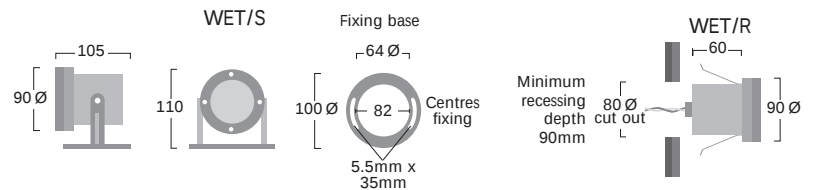

Marine Low Voltage

ORDER CODES

IP68 LOW VOLTAGE DOWNLIGHT

LUMINAIRE	SUPPLIED LESS LAMP
WET/S	Surface mounted housing
WET/R	Recessed housing

LENS OPTIONS (CLEAR GLASS AS STANDARD)

WET/FL	Frosted lens
WET/RL	Red filter lens
WET/BL	Blue filter lens
WET/GL	Green filter lens
WET/YL	Yellow filter lens

TRANSFORMER OPTIONS (WEATHERPROOF ENCLOSURE TO IP56)

WET/50VA	240 / 12V	50 VA
WET/100VA	240 / 12V	100 VA
WET/150VA	240 / 12V	150 VA
WET/200VA	240 / 12V	200 VA
WET/250VA	240 / 12V	250 VA

To specify state:
Cast stainless steel low voltage luminaire, surface and recessed mounting. IP68 – as Whitecroft Lighting MARINE LOW VOLTAGE.

Marine
LOW VOLTAGE 12V 20W SPOT LIGHT Angle 38°

HGT	LUX	Ø
1.0m	700	0.70m
2.0m	175	1.50m
3.0m	78	2.20m
4.0m	44	2.90m

Marine
LOW VOLTAGE 12V 50W SPOT LIGHT Angle 38°

HGT	LUX	Ø
1.0m	2000	0.70m
2.0m	500	1.50m
3.0m	222	2.20m
4.0m	125	2.90m

Marine
LOW VOLTAGE 12V 50W SPOT LIGHT Angle 60°

HGT	LUX	Ø
1.0m	1000	1.00m
2.0m	250	2.00m
3.0m	111	3.00m
4.0m	63	4.00m

Marine
LOW VOLTAGE 12V 65W SPOT LIGHT Angle 38°

HGT	LUX	Ø
1.0m	2600	1.70m
2.0m	650	1.50m
3.0m	289	2.20m
4.0m	163	2.90m

