


Photometry

Spectre

1 x 26W TC-D Lamp




- SHR MAX = 1.831
- DLOR = 0.44




UTILISATION FACTORS UF(F)										SHR NOM 1.75	
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.26	0.29	0.31	0.33	0.35	0.36	0.38	0.39
0.50	0.30	0.20	N/A	0.21	0.23	0.25	0.27	0.29	0.30	0.31	0.32
0.00	0.00	0.00	N/A	0.14	0.15	0.16	0.17	0.18	0.19	0.19	0.20

Spectre

2 x 26W TC-D




- ULOR = 0.22
- DLOR = 0.22



UTILISATION FACTORS UF(F)										SHR NOM 1.75	
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	N/A	0.34	0.36	0.39	0.41	0.43	0.44	0.46	0.47
0.50	0.50	0.20	N/A	0.30	0.33	0.35	0.38	0.40	0.41	0.43	0.44
0.00	0.00	0.00	N/A	0.27	0.30	0.32	0.35	0.36	0.37	0.39	0.40


Custodian

1 x 70W SON-E Lamp



Perimaliter

150W SON




Lumasquare

70W SON WITH POLYCARBONATE REFRACTOR



- DLOR = 0.84




UTILISATION FACTORS UF(F)												
Room Reflectance			Room Index									
C	W	F	0.50	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.22	0.26	0.29	0.33	0.38	0.44	0.50	0.59	0.68	0.78
0.50	0.30	0.20	0.15	0.17	0.20	0.24	0.29	0.34	0.40	0.49	0.58	0.69
0.00	0.00	0.00	0.07	0.10	0.12	0.15	0.19	0.24	0.29	0.37	0.45	0.55

G-Line

1 x 28W 2D Lamp




- SHR MAX = 1.55
- ULOR = 0.068
- DLOR = 0.508



UTILISATION FACTORS UF(F)										SHR NOM 1.75	
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.28	0.33	0.37	0.40	0.44	0.47	0.49	0.52	0.54
0.50	0.30	0.20	0.22	0.27	0.31	0.34	0.38	0.41	0.43	0.46	0.48
0.00	0.00	0.00	0.17	0.20	0.24	0.26	0.30	0.33	0.35	0.37	0.39

Euroflood Mini


MEDIUM BEAM Peak intensity 43° to 50°

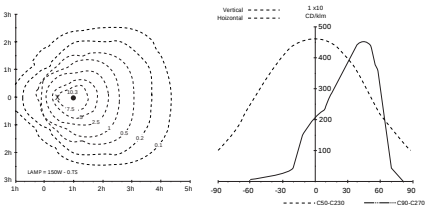

CONVERSION FACTOR			
4m	5m	6m	8m
1.56	1.00	0.69	0.39
LOR 70%			

Euroflood Midi


NARROW BEAM Peak intensity 42° to 47°

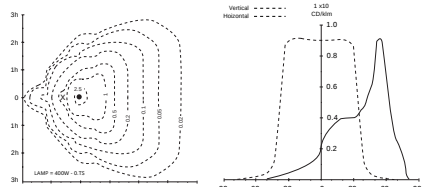

CONVERSION FACTOR			
6m	8m	10m	12m
2.78	1.56	1.00	0.69
LOR 75%			

Euroflood Midi

WIDE BEAM Peak intensity 42° to 47°

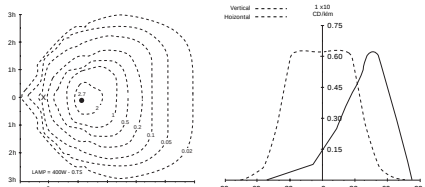

CONVERSION FACTOR			
6m	8m	10m	12m
2.78	1.56	1.00	0.69
LOR 74%			