

Pathfinder 2 Exit Sign Architectural



Wall mounted, recessed or suspended architectural Exit sign for 24V DC Pathfinder 2 central battery system



Wall Exit



Recessed Exit

Optics

- Dedicated LED emergency Exit sign for Pathfinder 2 system
- Maintained as standard
- Can be configured as switched maintained, dimmed or non-maintained
- Attractive, low energy solution
- High sign luminance $>500 \text{ cd/m}^2$, ideal for brightly lit environments

Body

- Extruded aluminium frame for high quality feel
- Wall mounted, recessed and suspended versions
- Suspended version uses remote mounted control gear
- White or silver finish
- Input voltage 24V DC
- Supplied complete with driver
- 1.8W total power, 320mA output current
- High quality screen printed legend panel - to be ordered separately
- Legends supplied in accordance with BS 5266-1 (ISO7010)
- Legends have a viewing distance of up to 20m

Note: Pathfinder 2 LED luminaires can only be used as part of a Pathfinder 2 system

Order codes

Exit signs

Description	White	Silver
Suspended	PFD2EX3SUSWT	PFD2EX3SUSSL
Wall mounted	PFD2EX3WALLWT	PFD2EX3WALLSL
Recessed	PFD2EX3RECWT	PFD2EX3RECSL
Legends to be ordered separately		


Legend panels

Description	Order Code
Exit legend single 'up' arrow	PFD2EX3S7010U
Exit legend single 'down' arrow	PFD2EX3S7010D
Exit legend single 'left' arrow	PFD2EX3S7010L
Exit legend single 'right' arrow	PFD2EX3S7010R

Codes are for single-sided legends.

Double-sided Exit signs require 2 legends - up/up, down/down or left/right

Dimensions

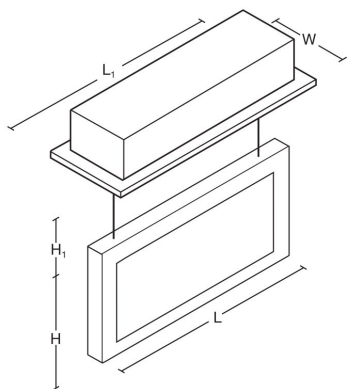

VERSION	L	L1	W	H	H1	KG(EM)
Suspended	237	275	65	140		1.2
Wall mounted	237		46	137		1.0
Recessed	237	275	65	140	85	1.2

To Specify

Dedicated architectural LED emergency Exit sign for 24V DC central battery, central test emergency lighting system. Fully addressable emergency lighting points. Control unit with programmable interface – as Whitecroft Lighting PATHFINDER 2