

Powerbay

Suspended LED high bay luminaire for medium height applications



Diffused Lens Wide Beam



Refractor Lens Wide Beam

Optics

- Nominal output 8,800 to 20,000 lumens (70 to 154W)
- 4000K, Ra80 LED
- Open body with medium or wide beam distribution
- Decorative refractor option with wide beam distribution

Body

- IP40
- IK08 rated body (excluding refractor)
- Die cast aluminium body, finished in silver RAL 9006
- Supplied with suspension ring and carabiner for simple installation
- Optional 5m suspension kit, supplied separately
- Integral emergency options:
 - 3 hour self contained
 - 3 hour COMECS addressable
- Supplied with plug and socket for quick installation
- Dali driver as standard
- Ambient operating temperature range:
 - Standard: -20°C up to 40°C
 - Emergency: 0°C up to 30°C

Order codes

Clear Lens Medium Beam

Medium beam, disc	Standard	3hr Emergency	LL/CW	L70
10,255 lumen, 70W	PBY14KM	PBY14KMEM	146	50k
19,916 lumen, 154W	PBY24KM	PBY24KMEM	129	50k

Diffused Lens Wide Beam

Wide beam, disc	Standard	3hr Emergency	LL/CW	L70
9860 lumen, 70W	PBY14KW	PBY14KWEM	141	50k
17,782 lumen, 141W	PBY24KW	PBY24KWEM	126	50k

Refractor Lens Wide Beam

Wide beam, refractor	Standard	3hr Emergency	LL/CW	L70
8837 lumen, 70W	PBY14KWR*	PBY14KWREM*	126	50k
15,852 lumen, 140W	PBY24KWR*	PBY24KWREM*	113	50k
* Requires refractor to be ordered separately EC50				

Options

COMEPS	PBY14KMEP
--------	-----------


Accessories

5m suspension Kit	PBYSUSKIT
Refractor	EC50

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM

Dimensions

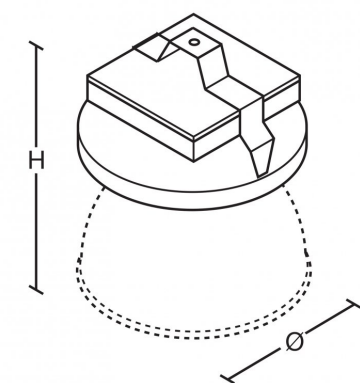

VERSION	H	KG	KG(EM)	Ø
Open	186	7.2	8.2	415
Refractor	460	9.2	10.2	570

Photometric Performance

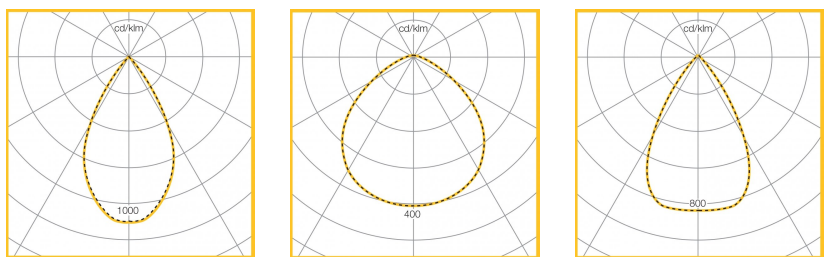

Medium beam
19916 lumen
154W
LOR = 100%

Wide beam 17782
lumen 141W
LOR = 100%

Refractor 15852
lumen 140W
LOR = 100%

To Specify

IP40 Suspended LED high bay with open body or refractor lens to offer a range of lighting distributions. Supplied with Dali driver and fitted lead and plug for quick installation – as Whitecroft Lighting POWERBAY