

sirocco discus

Exterior: IP55 Amenity lighting for open spaces – symmetrical throw



APPLICATION

- Parking areas
- Hotels
- Retail parks
- Walkways
- Public gardens
- Shopping areas
- Pedestrian precincts

SPECIFICATION

- Lamps:
 - 70W HQI-E
 - 100W HQI-E
- Class 1 protection
- Fits 60mm diameter column spigot as standard. (Adaptors for 76, 89, 114, 140, and 168mm available)
- Single and twin wall and post top options
- Designed for pole heights of between 2.5 and 4.0m
- IP55 protection and vandal resistant
- Black RAL 9005 polyester powder coated cast aluminium alloy top cover, canopy and base
- Lens in UV stabilised polycarbonate
- High purity anodised aluminium louvre
- Power factor corrected magnetic control gear
- All fixing screws in stainless steel
- Timed ignitor
- Integral gear
- Suitable for an ambient between -25°C to +35°C

QuickLink


DISC

Go




DIMENSIONS

Sirocco Discus

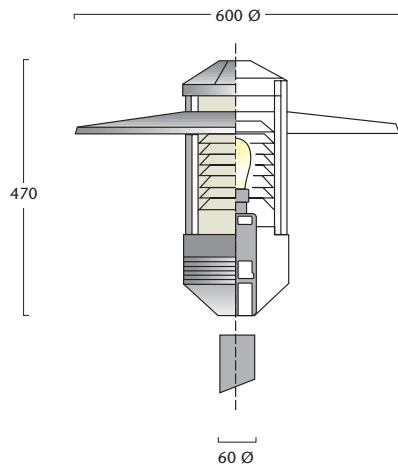

PHOTOMETRY

1 x 100W HQI-E Lamp

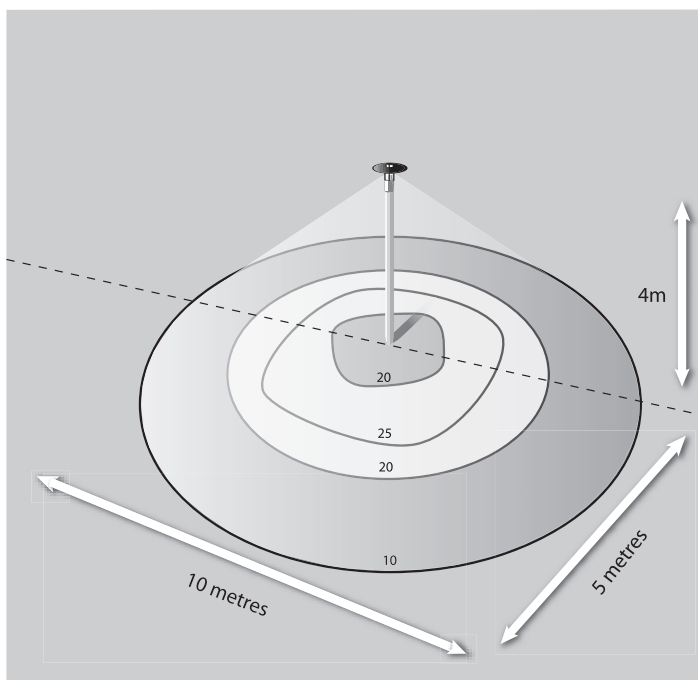

SCALE FACTORS

LAMP TYPE	SCALE FACTOR
100W HQI-E	1.0
70W HQI-E	0.73

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
70W HQI-E	6000	12,500
100W HQI-E	8200	12,500

WEIGHT AND WINDAGE

VERSION	WATTAGE	WEIGHT	WINDAGE
SID70H	70	8.0Kg	0.28m ²
SID100H	100	8.0Kg	0.28m ²

ORDER CODES – SIROCCO DISCUS

IP55 POST TOP AMENITY LIGHTING FOR OPEN SPACES

LAMP SUPPLIED	LUMINAIRE
1 x 70W HQI-E	SID70H
1 x 100W HQI-E	SID100H

MOUNTING ACCESSORIES:

For mounting accessories please refer to the column and adaptors on page 323

To specify state:

IP55 vandal resistant post top amenity luminaire with cast aluminium alloy top cover, canopy and base, finished Black and supplied with 70 or 100W HQI-E lamps. Lens in UV stabilised polycarbonate and louvre in high purity anodised aluminium. Designed for pole heights of 2.5 – 4m with single and twin wall and post top mounting options. Integral gear with timed ignitor and all fixings in SS – as Whitcroft Lighting SIROCCO DISCUS