

sirocco globe

Exterior: IP55 Amenity lighting for open spaces – symmetrical throw

APPLICATION

- Parking areas
- Hotels
- Retail parks
- Walkways
- Public squares
- Shopping areas
- Pedestrian areas

SPECIFICATION

- Lamp options:
 - 70W HQI-E
 - 150W HQI-E
- Class 1 protection
- IP55 protection
- 76mm Ø spigot mounting
- Vandal resistant polycarbonate bowl
- Clear open top or clear covered top bowl options
- 600mm Ø globe
- Integral control gear unit with louvre
- Timed ignitor
- Thermal cutout magnetic gear
- Column or wall mounting
- Supplied with lamp



QuickLink


GLOB

Go




DIMENSIONS

Sirocco Globe



PHOTOMETRY

1 x 150W HQI-E Lamp

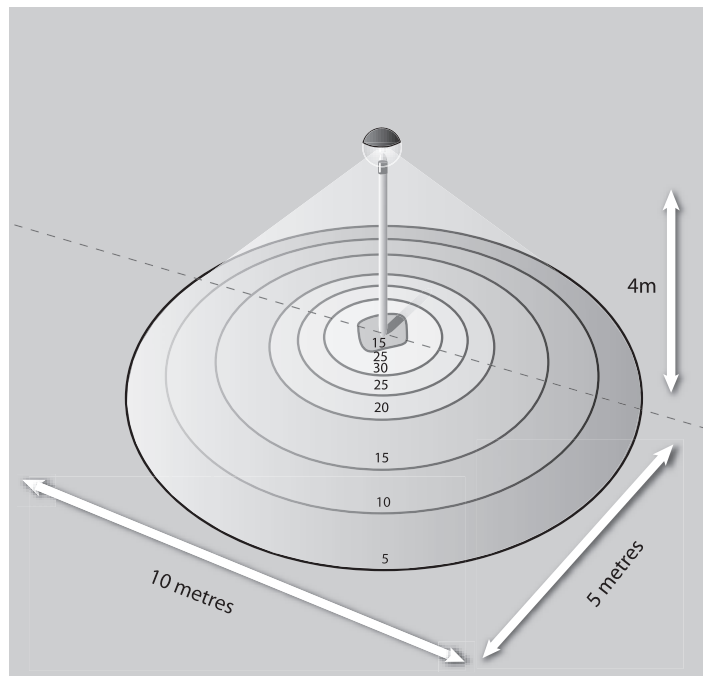

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
70W HQI-E	6000	12,500
150W HQI-E	13000	12,500

WEIGHT AND WINDAGE

VERSION	WATTAGE	WEIGHT	WINDAGE
SIG70H	70	11.4Kg	0.23m ²
SIG150H	150	11.4Kg	0.23m ²

ORDER CODES - SIROCCO GLOBE

IP55 POST TOP AMENITY LIGHTING FOR OPEN SPACES

LAMP SUPPLIED	LUMINAIRE	BOWL Ø	BOWL
70W HQI-E	600mm	Clear open top	SIG70HCO
	600mm	Clear covered top	SIG70HCC
150W HQI-E	600mm	Clear open top	SIG150HCO
	600mm	Clear covered top	SIG150HCC
	Single wall mounting bracket		SIGW1
	Two way wall mounting bracket		SIGW2

MOUNTING ACCESSORIES:

For mounting accessories please refer to the column and adaptors page 323

To specify state:

P55 post top amenity luminaire with 600mm dia vandal resistant polycarbonate bowl. Integral control gear with timed ignitor and louvre – as Whitecroft Lighting SIROCCO GLOBE