

sirocco spoke

Exterior: IP55 Amenity lighting for open spaces – symmetrical throw

APPLICATION

- Parking areas
- Hotels
- Retail parks
- Walkways
- Public gardens
- Shopping areas
- Pedestrian precincts


SPECIFICATION

- Lamps:
 - 70W HQI-E
 - 100W HQI-E
- Class 1 protection
- Fits 76mm diameter column spigot as standard. (Adaptors for 89, 114, 140, and 168mm available)
- Designed for pole heights of between 2.5 and 4.0m
- IP55 protection and vandal resistant
- Black RAL 9005 polyester powder coated cast aluminium alloy top cover hub, spokes, rim and base
- Lens in UV stabilised high impact acrylic
- Anodised aluminium louvre
- Power factor corrected magnetic control gear
- All fixing screws in stainless steel
- Integral gear
- Timed ignitor
- Suitable for an ambient between -25°C to +35°C
- For mounting accessories please refer to the columns and adaptors on page 323




DIMENSIONS

Sirocco Spoke

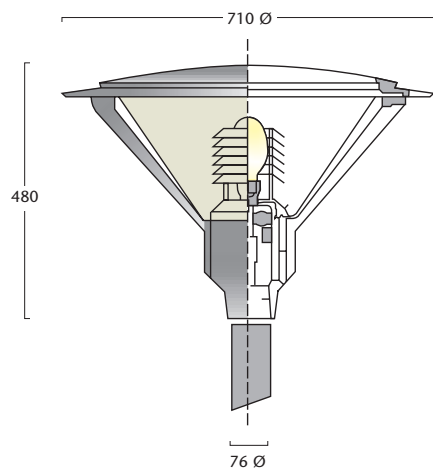

PHOTOMETRY

1 x 100W HQI-E Lamp

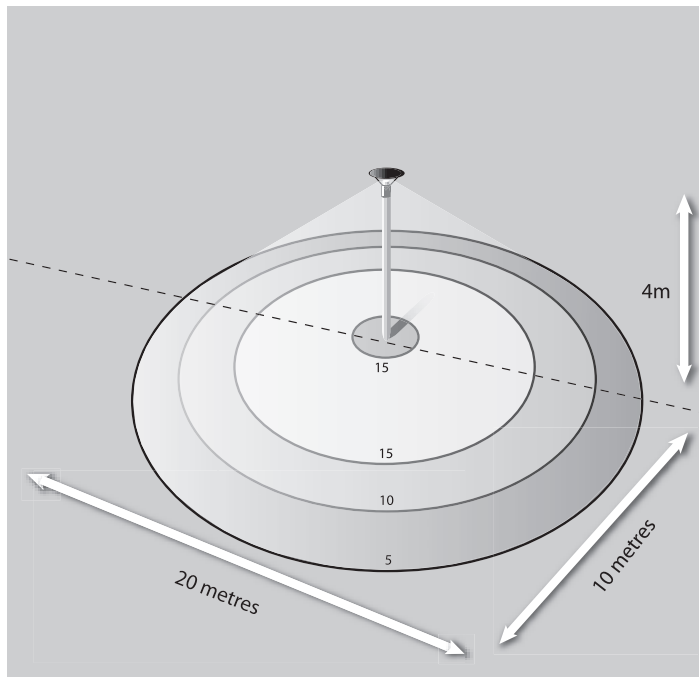

SCALE FACTORS

LAMP TYPE	SCALE FACTOR
100W HQI-E	1.0
70W HQI-E	0.73

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
70W HQI-E	6000	12,500
100W HQI-E	8200	12,500

WEIGHT AND WINDAGE

VERSION	WATTAGE	WEIGHT	WINDAGE
SIS70H	70	16.5Kg	0.40m ²
SIS100H	100	17.0Kg	0.40m ²

ORDER CODES – SIROCCO SPOKE

IP55 POST TOP AMENITY LIGHTING FOR OPEN SPACES

LAMP SUPPLIED	LUMINAIRE
1 x 70W HQI-E	SIS70H
1 x 100W HQI-E	SIS100H

MOUNTING ACCESSORIES:

For mounting accessories please refer to the column and adaptors on page 323

To specify state:

IP55 vandal resistant post top amenity luminaire with cast aluminium alloy top cover hub, spokes, rim and base, finished black and supplied with 70 or 100W HQI-E lamps. Lens in UV stabilised high impact acrylic and louvre in high purity anodised aluminium. Designed for pole heights of 2.5 – 4m with single and twin wall and post top mounting options. Integral gear and all fixings in SS – as Whitecroft Lighting SIROCCO SPOKE