

slice

Emergency: Ultra low profile indoor emergency bulkhead



APPLICATION

Designed for applications requiring a slim unobtrusive emergency luminaire or exit sign

- Wall or ceiling mount
- Areas with low ceiling heights
- Reception areas
- Hotel corridors
- Exit routes

SPECIFICATION

- Supplied with 8W T5 lamp
- Clear polycarbonate TP(a) snap fix clear diffuser with Fresnel lens
- Low tack self adhesive legends – please specify separately see page 190
- Viewing distance up to 22m when using legend panel
- Suitable for ceiling or wall mounting
- White polycarbonate body is designed to be installed and wired in the first fix. The polycarbonate gear and lamp module also finished white can be clipped on position when building work is complete
- IP20
- 3 hour self contained maintained or non-maintained versions
- High temperature Ni - Cd battery with constant current charger and LED charge indicator
- BESA rear cable entry
- Ambient 0 to 25°C
- Designed and manufactured to meet the requirements of BS EN60598.2.22

Options

-  Easytest – integral self test version available see page 181

QuickLink

CUT

Go





FEATURES

	CUT/NM/F8/W	CUT/M/F8/W
MODE	Non-maintained	Maintained
DURATION	3 hours	3 hours
NORMAL LAMP OUTPUT	–	400 lumens
EMERGENCY LAMP OUTPUT	80 lumens	80 lumens
INPUT VOLTAGE	230/240V – 50Hz	
CIRCUIT WATTS	8W	20W
BATTERY TYPE	High temperature Ni – Cd battery	
RECHARGE TIME	24 hours	

ORDER CODES – SLICE

ULTRA LOW PROFILE INDOOR EMERGENCY LIGHTING BULKHEAD

LAMP SUPPLIED	EMERGENCY LIGHTING	EMERGENCY UNIT
1 x 8W T5	3 hour non-maintained	CUT/NM/F8/W
1 x 8W T5	3 hour maintained	CUT/M/F8/W

EASYTEST OPTION Add suffix to order codes above

/ET  Integral self auto-test, i.e. CUT/NM/F8/W/ET


LOW TACK SELF ADHESIVE LEGENDS Order separately

See page 190 to specify

To specify state:

All polycarbonate ultra slim IP20 8W T5 indoor emergency bulkhead. Snap fix diffuser to incorporate Fresnel lens. White back body to facilitate first fix installation and wiring with clip in gear and lamp module. 3 hour self contained maintained or non-maintained versions. High temperature Ni – Cd battery with constant current charger and LED charge indicator – as Whitecroft Lighting SLICE

DIMENSIONS

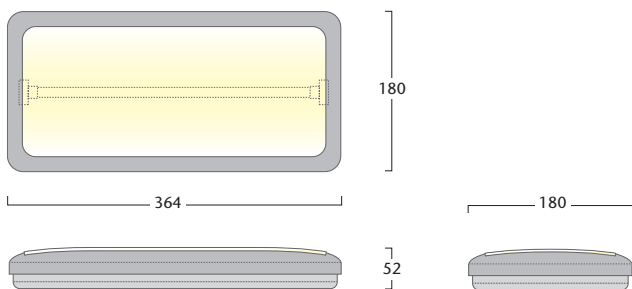

SPACING DATA TABLE

Ceiling mounting height (metres)	Lighting level (lux)	Escape route (min 0.2 lux) permanently unobstructed				Escape route (min 1.0 lux) normal risk				Anti Panic (min 0.5 lux) open area			
		↔	□	↔	□	↔	□	↔	□	↔	□	↔	□
2.5	2.16	3.6	9.2	9.1	3.6	2.3	5.6	5.0	1.7	2.0	5.9	5.7	1.7
4	0.90	4.4	10.7	10.6	4.0	-	6.8	4.4	-	2.3	7.0	6.7	1.5
6	0.40	5.3	13.0	11.3	3.6	-	-	-	-	-	8.5	7.0	-