

SQ


Downlighters: Square Compact Fluorescent Downlighter

OPTIC


- Lamp options:
 - 1 x 26/32/42W TC-T, utilising HF multi-watt ballast.
 - Emergency and dimming versions utilise specific wattage ballasts
- Faceted vacuum metalized reflector
- Optional version with decorative feature glass
- Supplied less lamp

BODY

- Square recessed downlighter
- Injection moulded flame retardant polycarbonate body with white die cast bezel
- Fitting is supplied complete with a 2m lead with free stripped ends

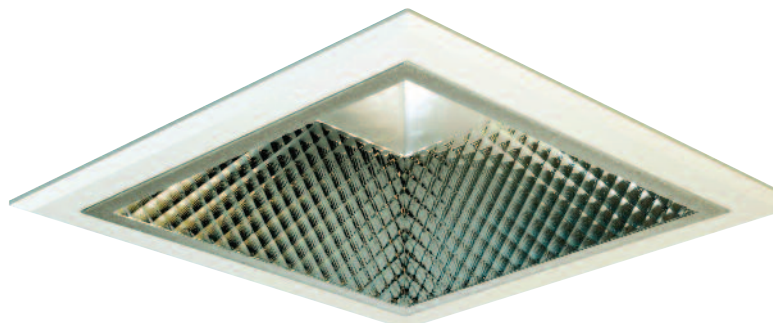

PHOTOMETRY



- 1 x 42W TC-D
- LOR = 62.1%
- SHR MAX = 1.81

Utilisation Factors UF(F)

Room Reflectance			Room Index		
C	W	F	1.00	3.00	5.00
0.70	0.50	0.20	0.48	0.63	0.67

LAMP PERFORMANCE

Wattage	IL@25°C	Lamp Life
1 x 26W TC-T	1800	12,000hrs
1 x 32W TC-T	2200	12,000hrs
1 x 42W TC-T	3200	12,000hrs

ORDER CODES - SQ

SUPPLIED LESS LAMP	HF GEAR	3 HR EMERGENCY
TC-T 1 x 26W	SQH126-42	SQH126EM
TC-T 1 x 32W	SQH126-42	SQH132EM
TC-T 1 x 42W	SQH126-42	SQH142EM

**Note: For dimming and emergency options, the wattage must be specified*


OPTIONS

FEATURE GLASS	Add suffix FG to order code	i.e. SQH126-42 FG
DALI DIMMING	Replace H with Y in order code	i.e. SQY126
DSI DIMMING	Replace H with D in order code	i.e. SQD126
SWITCH DIMMING	Replace H with X in order code	i.e. SQX126
EASYTEST	Add suffix /ET to order code	i.e. SQH126/ ET

To specify state:

Square compact fluorescent downlighter with faceted reflector, die cast bezel and polycarbonate body – as Whitecroft Lighting SQ

DIMENSIONS



L	W	H	W ₁	KG	KG
244	244	192	210	1.5	2.8