

strato

Accent: Track mounted directional spotlight



Strato CDM-TD

APPLICATION

- Retail
- Museum & Galleries
- Receptions

SPECIFICATION

- Lamp options:
 - 35/70W CDM-T
 - 70W CDM-TD
- For use with 3 circuit track
- Electronic ballast
- Ballast housing, shade and trim ring of die cast aluminium painted silver (RAL9006) or white (RAL9010)
- Protective glass integrated in the trim ring
- Swivels 360° and tilts 0-90°. Can also be tilted 90° upwards on the Y-axis
- Specular anodised aluminium reflector. Available with narrow (14°), medium (24°) or wide (42°) distribution
- Supplied less lamp



PHOTOMETRY

70W CDM-T

	LUX	
M	70W	Ø
1.0m	43283	0.3
2.0m	10821	0.5
3.0m	4809	0.8
4.0m	2705	1.0

Spot 14°

70W CDM-T

	LUX	
M	70W	Ø
1.0m	21498	0.4
2.0m	5374	0.8
3.0m	2389	1.3
4.0m	1344	1.7


Medium 24°

70W CDM-T

	LUX	
M	70W	Ø
1.0m	7600	0.8
2.0m	1902	1.5
3.0m	846	2.3
4.0m	476	3.1

Flood 42°

DIMENSIONS

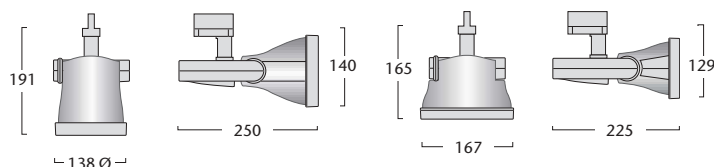

ORDER CODES - STRATO

TRACK MOUNTED DIRECTIONAL SPOTLIGHT

SUPPLIED LESS LAMP

	SPOT REFLECTOR	MEDIUM REFLECTOR	FLOOD REFLECTOR	COLOUR
35W CDM-T	STRA-C35E-M3-21	STRA-C35E-M3-22	STRA-C35E-M3-23	White
35W CDM-T	STRA-C35E-M3-11	STRA-C35E-M3-12	STRA-C35E-M3-13	Silver
70W CDM-T	STRA-C70E-M3-21	STRA-C70E-M3-22	STRA-C70E-M3-23	White
70W CDM-T	STRA-C70E-M3-11	STRA-C70E-M3-12	STRA-C70E-M3-13	Silver
70W CDM-TD		STRA-C70E-M3-2D		White
70W CDM-TD		STRA-C70E-M3-1D		Silver

To specify state:

3 circuit track mounted spotlight for 35W or 70W CDM-T lamp with integral electronic gear. Die cast aluminium body, with specular aluminium reflector giving narrow (14°), medium (24°) or wide (42°) distribution and with 360° swivel and 0-90° tilt, as Whitecroft Lighting STRATO.



Lighting for Life

Whitecroft Lighting Ltd

Burlington Street, Ashton-under-Lyne
Lancashire OL7 0AX United Kingdom

Tel: +44 (0)870 5 087 087 Fax: +44 (0)870 5 084 210
email@whitecroftlight.com www.whitecroftlighting.com