

iTrack suspension

ceiling mounting
options



Wire Suspension Kit



15mm Ceiling Tee Adapter



25mm Ceiling Tee Adapter



Wire Suspension Kit Detail

Order Codes

Components


Surface suspension bracket	ITRBSURF
Wire suspension kit (1 meter)	ITRBPEND
Wire suspension kit (3 meter)	ITRBPEND/3M
15mm ceiling tee adapter (use in conjunction with wire suspension kit)	CBT15
25mm ceiling tee adapter (use in conjunction with wire suspension kit)	CBT25




Surface Suspension Bracket Detail

Permitted Mechanical Loads

iTrack Length 3 Meters




iTrack Length 2 or 4 Meters



Load Table

X	P1	P2	L
2m	10KG	9KG	14KG
3m	10KG	2KG	6KG

For more information please refer to iTrack design guide

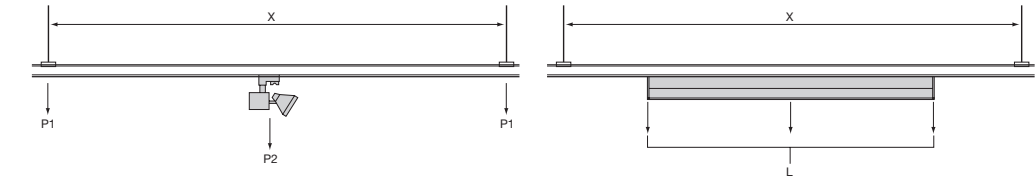

Suspension Point Rules

1. Power feed requires dedicated suspension point.
2. First iTrack length in any run must have 2 suspension points.
3. Any joint should always have a suspension point within 500mm.
4. There should always be a suspension point within 500mm of the end run.
5. For maximum distance between suspension points refer to load table and suspension diagram.