

trimpak

T5 and T8 fluorescent battens

> weblink > TP

Optics

- Lamp options:
 - 1 or 2 x 28/35/49/54/80W T5
 - 1 or 2 x 36/58/70W T8

Body

- Steel batten finished white
- BESA fixings on body section
- Range of attachments available:
 - Polycarbonate or acrylic diffusers
 - Symmetric, asymmetric or high rack reflectors
 - Wire guard (for use with symmetric reflector)
- Command 6 sensor available mounted on the end of the luminaire




ORDER CODES

Trimpak	HF Gear	3 hr Emergency
T5 1 x 28W	TPH128	TPH128EM
T5 1 x 35W	TPH135	TPH135EM
T5 1 x 49W	TPH149	TPH149EM
T5 1 x 54W	TPH154	TPH154EM
T5 1 x 80W	TPH180	TPH180EM
T5 2 x 28W	TPH228	TPH228EM
T5 2 x 54W	TPH254	TPH254EM
T5 2 x 35W	TPH235	TPH235EM
T5 2 x 49W	TPH249	TPH249EM
T5 2 x 80W	TPH280	TPH280EM
T8 1 x 36W	TPH136	TPH136EM
T8 1 x 58W	TPH158	TPH158EM
T8 1 x 70W	TPH170	TPH170EM
T8 2 x 36W	TPH236	TPH236EM
T8 2 x 58W	TPH258	TPH258EM
T8 2 x 70W	TPH270	TPH270EM


Options

DALI DIMMING	Replace H with Y in order code	i.e. TPY128
DSI DIMMING	Replace H with D in order code	i.e. TPD128
SWITCH DIMMING	Replace H with X in order code	i.e. TPX128
COMMAND 6	Add Q6 before H in order code	i.e. TPQ6H128
COMMAND 6 DALI	Replace H with Q6Y in order code	i.e. TPQ6Y128
EASYTEST	Add suffix /ET to order code	i.e. TPH128/ET
COMET	Add suffix /CT to order code	i.e. TPH128/CT

PHOTOMETRIC PERFORMANCE



- 1 x 35W T5
- LOR = 96%
- SHR MAX = 1.85



- 2 x 35W T5
- LOR = 94%
- SHR MAX = 1.75

Utilisation Factors UF(F)

Room Reflectance	Room Index			
C	W	F	1.00	3.00
0.70	0.50	0.20	0.53	0.78
				0.86



Utilisation Factors UF(F)

Room Reflectance	Room Index			
C	W	F	1.00	3.00
0.70	0.50	0.20	0.49	0.75
				0.82

LAMP PERFORMANCE

Wattage	IL@25°C	Lamp Life
1 x 28W T5	2600	24,000hrs
1 x 35W T5	3300	24,000hrs
1 x 49W T5	4300	24,000hrs
1 x 54W T5	4450	24,000hrs
1 x 80W T5	6150	24,000hrs
1 x 36W T8	3350	19,000hrs
1 x 58W T8	5200	19,000hrs
1 x 70W T8	6200	19,000hrs

DIMENSIONS

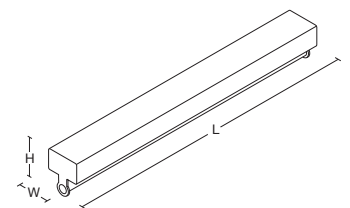

Version	L	W	H	KG	KG
28/54W	1221	101	87	2.3	3.3
35/49/80W	1524	101	87	3.0	4.0
36W	1221	102	79	2.3	3.3
58W	1524	102	79	3.0	4.0
70W	1786	102	79	3.2	4.2

BESA fixing centres at 600mm on all products

Version	L	W	H	KG	KG
28/54W	1221	58	88	2.2	3.2
35/49/80W	1524	58	88	2.3	3.3
36W	1221	58	79	2.2	3.2
58W	1524	58	79	2.3	3.3
70W	1786	58	79	2.7	3.7

BESA fixing centres at 600mm on all products

PERFORMANCE GUIDE

Lamps	Illuminance	Spacing
2 x 28W T5	320 lux	3.0m x 3.0m

Maintenance: 0.8
Reflectance: 70/50/20
Ceiling Height: 6m
Working Plane: 0.0m

TO SPECIFY

Fluorescent batten with rigid section body and clip on cover. Twist locking lamp holders for quick and easy installation – as Whitecroft Lighting TRIMPAK