

Trimpak – T5

MOTIVATION

To offer an economical rigid section batten channel with a clip-on cover and high quality finish suitable for high efficiency and high output T5 lamps. A full range of attachments allows design flexibility. The high output versions allow Trimpak to be used on higher ceilings

APPLICATION

- Factories
- Workshops
- Offices
- Shops
- Warehouses
- Concealed lighting

SPECIFICATION

- Rigid section batten channel
- Clip on cover
- BESA fixing on body section
- Single or twin lamp options
- High frequency gear
- Three hour emergency versions
- Supplied complete with lamps with 4000K cool white multiphosphor tubes
- Attachment availability and order codes as T8 Trimpak of the same length




PROJECT LIGHTING SOLUTIONS

In addition to our standard product offer, we are able to supply a range of additional options to satisfy needs on major project applications. This luminaire is only available for large projects, please contact our sales office for details.

Trimpak

1 X 35W T5 Batten


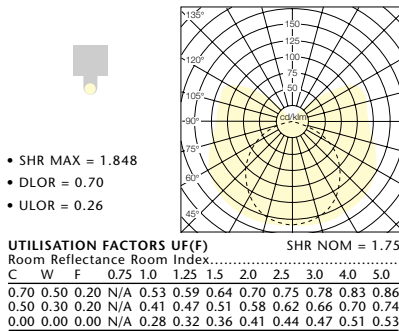


FEATURES AND DIMENSIONS				
LAMP SUPPLIED	LONGITUDINAL DIMENSIONS	FIXING CENTRE	FIXING DETAIL	WEIGHT KG
1 x 28W T5 HE	1221	600	3 x BESA	2.2
1 x 54W T5 HO	1221	600	3 X BESA	2.2
1 X 35W T5 HE	1524	600	3 X BESA	2.3
1 X 80W T5 HO	1524	600	3 X BESA	2.3
2 X 28W T5 HE	1221	600	3 X BESA	2.3
2 X 54W T5 HO	1221	600	3 X BESA	2.3
2 X 35W T5 HE	1524	600	3 X BESA	3.0
2 X 80W T5 HO	1524	600	3 X BESA	3.0

Ambient temperature:-
+5°C to +25°C


Single lamp

Twin lamp

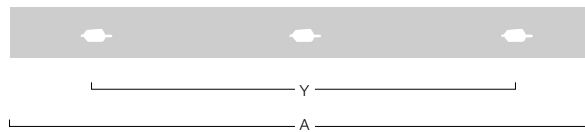


Trimpak

2 X 35W T5 Batten

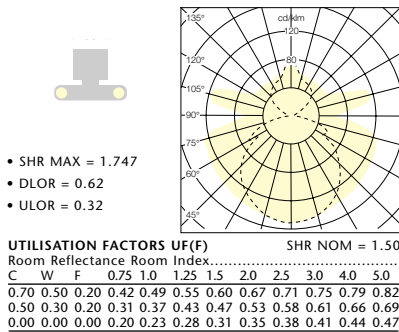


Trimpak

2 X 80W T5 Hi-Rack Reflector

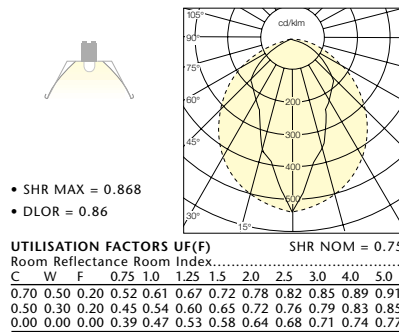

Trimpak

1 X 80W Trough Reflector

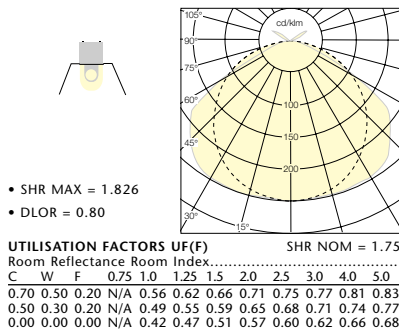

Trimpak

RECOMMENDED MOUNTING HEIGHTS

TRIMPAK 2 X 80W T5 BATTEN WITH HI-RACK REFLECTOR

Mounting height (metres)	8	10	12
Luminaire spacing (metres)			
- To give 300 lux	3.0	2.5	2.0
- To give 150 lux	N/A	5.0	4.0
Minimum row length (metres)			
For these recommendations	24	30	30

LINEAR FLUORESCENT T5

WATTAGE	IL@25°C
28W HE	2640
35W HE	3320
54W HO	4460
80W HO	6450

Whitecroft Lighting Ltd
Burlington Street
Ashton-under-Lyne
Lancashire OL7 0AX
United Kingdom

Telephone: +44 (0)870 5 087 087
Facsimile: +44 (0)870 5 084 210
email@whitecroftlight.com
www.whitecroftlighting.com

Moorlite•Hitech•Simplex

Trimpak - T5

ORDER CODES

T5-FLUORESCENT BATTEN SYSTEM

	LENGTH	LAMP SUPPLIED
TP128H	4ft	1 x 28W T5 HE
TP154H	4ft	1 x 54W T5 HO
TP135H	5ft	1 x 35W T5 HE
TP180H	5ft	1 x 80W T5 HO
TP228H	4ft	2 x 28W T5 HE
TP254H	4ft	2 x 54W T5 HO
TP235H	5ft	2 x 35W T5 HE
TP280H	5ft	2 x 80W T5 HO

EMERGENCY Add suffix to order codes above

/EMIN – 3 hour maintained fully integral emergency for all versions except 80W
e.g. TP135HEMIN. The middle BESA fixing is covered on the emergency version.

To specify state.

T5 Fluorescent batten with rigid section body clip on cover. Twist locking lamp holders for quick and easy installation – as Whitecroft Lighting TRIMPAK T5.