

vespère wall mounted

Surface fluorescent: Architectural fluorescent wall light

APPLICATION


- Feature lighting
- Stairwells
- Corridors
- Reception areas
- Interior walkways
- Public areas
- Toilets

PHOTOMETRY

Vespère
WALL MOUNTED
2 x 36W TC-L Lamps



- SHR MAX = 1.21
- LOR = 40.8%




UTILISATION FACTORS UF(F)		SHR NOM=1.00									
Room Reflectance		Room Index									
C	W	F	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.15	0.18	0.20	0.22	0.25	0.27	0.29	0.31	0.32
0.50	0.30	0.20	0.09	0.12	0.14	0.16	0.18	0.20	0.22	0.24	0.25
0.00	0.00	0.00	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.12	0.13

SPECIFICATION

- Lamp options:
 - 2 x 36W TC-L
- Body:
 - Fabricated steel
 - White polyester powder paint finish RAL 9010
 - Curved panel fabricated perforated steel
- Wall mounting
- IP20 protection
- Slim design: 98mm protrusion from wall
- High frequency control gear
- 3 hour integral maintained emergency option
- Supplied less lamps

DIMENSIONS

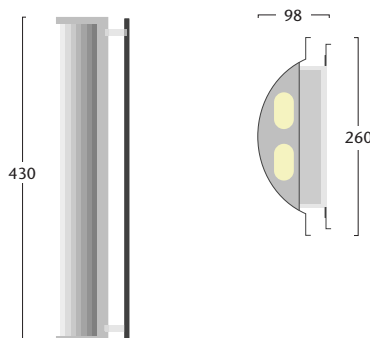

Options

-  Easytest – integral self test version available see page 181

ORDER CODES – VESPERE

ARCHITECTURAL FLUORESCENT WALL LIGHT

SUPPLIED LESS LAMP	STANDARD	GEAR
2 x 36W TC-L	VWMH236	High frequency

EMERGENCY Add suffix to order code above

EMIN	3 hour maintained fully integral emergency, i.e. VWMH236EMIN
-------------	---

EASYTEST OPTION Add suffix to order code above

/ET	Integral self autotest, i.e. VWMH236/ET
------------	--

To specify state:

Wall mounted compact fluorescent luminaire with curved perforated front panel protruding a maximum of 98mm – as Whitecroft Lighting VESPERE WALL MOUNTED



LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1 x 36W TC-L	2900	10,000

QuickLink

VWM

Go