

vigilant

direct/indirect bedhead luminaire

> weblink > **VIG**

Optics

- Lamp options:
 - 2 x 54W T5 (ward lighting)
 - 1 x 54W T5 (reading/nursing care)
- Removable profiled polycarbonate diffusers
- Both the ward and reading lamps are independently dimmable by “push control” and function so the following lighting levels can be selected to meet LG2:2008:
 - Patient rest 30-50 Lux
 - Watch light 10-20 Lux
 - Reading 300 Lux
 - General nursing care 300 Lux

Body

- Extruded aluminium body finished white
- Aluminium rear panel for direct to wall mounting
- Separate dimming circuits for circulation and reading lamps
- Optimum mounting height 2 metres




ORDER CODES

Vigilant	Standard
T5 3 x 54W	VIGX254154

LAMP PERFORMANCE


Wattage	IL@25°C	Lamp Life
1 x 54W T5	4450	24,000hrs

DIMENSIONS




L	W	H	KG
1308	154	202	12.0

TYPICAL 4 BED WARD

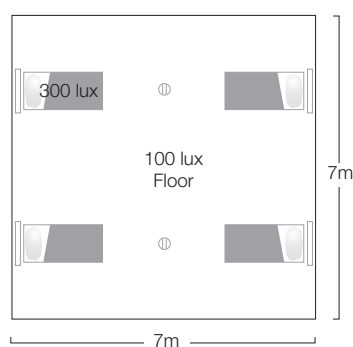

TYPICAL 1 BED WARD



Ⓢ Nightingale recommended for circulation area lighting

TO SPECIFY

Direct/Indirect wall mounted bedhead luminaire with 2 x 54W circulation lighting and 1 x 54W reading/nursing care light. Extruded aluminium body with profiled endcaps. Polycarbonate diffusers. Lamps can be independently dimmed by ‘push control’ – as Whitecroft Lighting VIGILANT