

vivant™ mist

Recessed fluorescent: T5 Architectural diffuser luminaire

APPLICATION

Vivant Mist caters for those specifiers who prefer complete lamp concealment whilst maintaining the Vivant aesthetic. It is particularly suitable for:

- Office break out areas
- Ambient retail lighting
- Corridors
- Conference rooms
- Boardrooms



SPECIFICATION

- Lamp options:
 - 4 x 14W T5 lamps

Body

- Body compatible with these ceiling types:
 - Exposed Tee 25mm and 15mm flat
 - 15mm Tegular
 - 15mm Decorative
 - Spring Tee
 - Cut aperture (plasterboard)

- Body:
 - 0.7mm gauge steel
 - Finished to RAL 9010
- High frequency or analogue dimming gear as standard
- Fused terminal block
- Push out ceiling suspension brackets
- 3 hour integral maintained emergency
- Supplied without lamps

Optics

- Perforated steel Matrix profiler (RAL 9010)
- Positively retained opal polycarbonate TP(a) diffuser laterally ribbed on the inner face and is curved to match the luminance profiler radius


Options

-  Easytest – integral self test version available see page 181

LAMP PERFORMANCE MATRIX

WATTAGE	IL@25°C	LAMP LIFE
1 x 14W T5	1200	20,000

DIMENSIONS

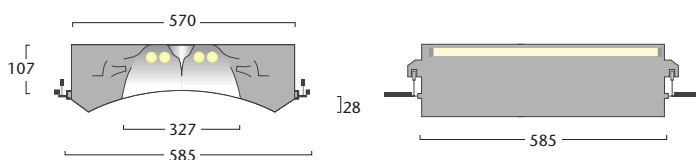

ORDER CODES – VIVANT MIST

ARCHITECTURAL DIFFUSER LUMINAIRE

SUPPLIED LESS LAMP	HIGH FREQUENCY	ANALOGUE DIMMING
4 x 14W T5	VIVMP414	VIVMP414HFR

OPTIONS Add suffix to order code

ST Suitable for Spring T and plasterboard ceilings, i.e. VIVMP414**ST**

EMERGENCY Add suffix to order codes above

EMIN 3 hour integral emergency, i.e. VIVMP414**EMIN**

EASYTEST OPTION Add suffix to order code above

/ET  Integral self autotest, i.e. VIVMP414/**ET**

To specify state:

Architectural semi recessed 600 x 600, 4 x 14W T5 luminaire with laterally ribbed opal polycarbonate TP(a) diffuser, curved to match luminance profiler radius and projecting only 28mm below the ceiling. Delivering light spill on the ceiling and a smoothly graduated wall wash – as Whitecroft Lighting VIVANT™ MIST

QuickLink

VIVM

Go