
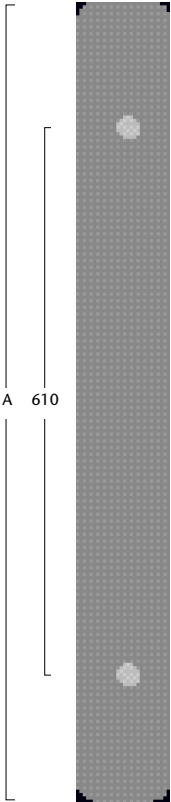



VANDAL RESISTANT LUMINAIRE

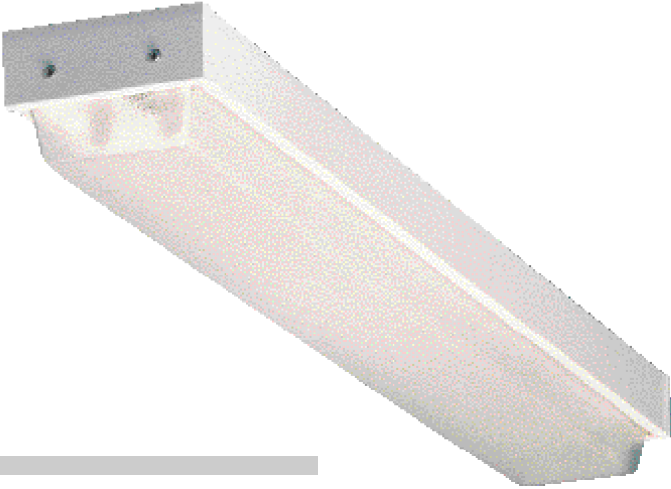

SPECIFICATION

- Integrity Designed in accordance with IP42.
- Surface mounted direct to the ceiling soffit.
- Switch start ballast with electronic canister start as standard, other options available on request.
- Constructed from heavy gauge zinc coated steel and white epoxy polyester powder coated (closest RAL equivalent RAL9016) finish to an average depth of 120µm.
- Impact resistant acrylic diffuser retained by steel end caps. Higher impact resistant diffuser materials available.
- Optional end cap design to provide conduit entry.

EMERGENCY CODE	
EM45BR*	36W and 58W lamp luminaires
EM6IN*	70W lamp luminaires

** Single lamp luminaires with emergency wire twin lamp body*

photometry

296

lamps

330

control

253

ORDER CODES	FEATURES AND DIMENSIONS MM				
	Lamp ways	Longitudinal dimensions	Fixing centre	Fixing detail	Weight Kg
		A	Y	No x Ø	
VR/SA/1436/W	1 x 36W	1354	610	2 x BESA	4.8
VR/SA/1558/W	1 x 58W	1653	610	2 x BESA	6.0
VR/SA/1670/W	1 x 70W	1919	610	2 x BESA	7.2
VR/SA/2436/W	2 x 36W	1354	610	2 x BESA	7.5
VR/SA/2558/W	2 x 58W	1653	610	2 x BESA	9.5
VR/SA/2670/W	2 x 70W	1919	610	2 x BESA	11.4