

Accent

Track mounted adjustable LED spotlight for accent lighting



Direct D3 Surface Mount



Accent, black



Accent on Surface Adapter

Optics

- Nominal 1000 and 2000 lumens (10W and 20W)
- 3000K and 4000K colour temperatures
- Ra >80
- Narrow, medium and wide optics (20°, 26° and 36° beam angles)
- 60,000 hours to L70B10

Body

- For use with Whitecroft Direct D3 track (3 circuit and Dali dimming)
- Adapter is compatible with:
 - Global Pro Trac - non DALI
 - Global Pro Pulse - DALI
- IP20
- Extruded aluminium body
- White RAL 9016 or black RAL 9005 finish
- Fixed output and DALI dimming options
- Electrical Class 1
- >0.9 power factor
- Suitable for ambient temperatures -25 to +25°C
- Stand-alone emergency available (see Direct D3 Track web page)
- Surface mounting adapter for use without track

Order codes

4000K

Version	Fixed Output, white	Fixed Output, black	LL/CW	L70
1113 lumen, 10.1W, narrow, 4000K	UAH14KWN	UAH14KBN	110.2	60k
1171 lumen, 10.1W, medium, 4000K	UAH14KWM	UAH14KBM	115.9	60k
1054 lumen, 10.1W, wide, 4000K	UAH14KWW	UAH14KBW	104.4	60k
1981 lumen, 20.6W, narrow, 4000K	UAH24KWN	UAH24KBN	96.2	60k
2086 lumen, 20.6W, medium, 4000K	UAH24KWM	UAH24KBM	101.3	60k
1877 lumen, 20.6W, wide, 4000K	UAH24KWW	UAH24KBW	91.1	60k

3000K

Version	Fixed Output, white	Fixed Output, black	LL/CW	L70
1053 lumen, 10.1W, narrow, 3000K	UAH13KWN	UAH13KBN	104.3	60k
1109 lumen, 10.1W, medium, 3000K	UAH13KWM	UAH13KBM	109.8	60k
998 lumen, 10.1W, wide, 3000K	UAH13KWW	UAH13KBW	98.8	60k
1879 lumen, 20.6W, narrow, 3000K	UAH23KWN	UAH23KBN	91.2	60k
1978 lumen, 20.6W, medium, 3000K	UAH23KWM	UAH23KBM	96	60k
1780 lumen, 20.6W, wide, 3000K	UAH23KWW	UAH23KBW	86.4	60k

Options

Title	Code	
DALI dimming	Change 'H' to 'Y'	i.e. UAY14KWN


Accessories/Attachments

Title	Code
Surface adapter, white	DDCLGW
Surface adapter, black	DDCLGB
For compatible 3 circuit and DALI track, see 'Direct D3'	

LED Performance


Colour Temp	RA (CRI)	Colour consistency
3000K / 4000K	80	MacAdam 3 SDCM

Dimensions

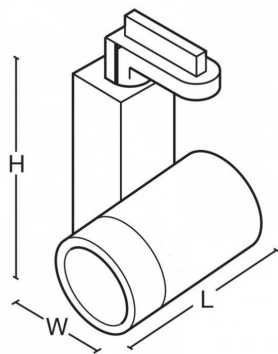

VERSION	L	W	H	KG
1000 lumen	122	130	145	0.9
1750 lumen	122	130	145	0.9

Photometric Performance

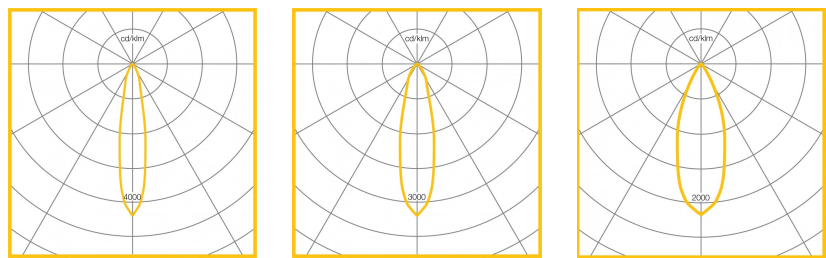

4000K 1683 lm
22W Narrow
LOR = 100%

4000K 1965 lm
22W Medium
LOR = 100%

4000K 1595 lm
22W Wide
LOR = 100%

To Specify

Track mounted LED spotlight with integrated driver, fixed output or DALI dimming. Extruded aluminium body with choice of narrow, medium or wide distribution with fully adjustable swivel and tilt - as Whitecroft Lighting ACCENT.

Application images

