

Centurion PP65

IP65 perimeter security lighting bulkhead



Optics

- Lamp options:
 - 26W TC-D
 - 42W TC-T
 - 70W SON-E
 - 70W HQI-E

Body

- IP65
- Black polycarbonate base and visor
- Clear UV stabilised prismatic polycarbonate diffuser
- Two 20mm dia knock-out options for the cable entry gland either side of the base
- Integral photocell option
- Optional uplight controller to limit upward light to 11%
- Integral emergency option on 26W - TC-D only (may not achieve design output at low ambient temperatures)
- Ambient operating temperature ranges
 - Non Emergency, -30°C to +25°C
 - Emergency, -5°C to +25°C

Order codes

Centurion

Centurion	Standard	3hr Emergency	LL/CW
TC-D 1 x 26W	CENP26	CENP26EMIN	53
TC-T 1 x 42W	CENP42		54
HQI-E 1 x 70W	CENP70H		55
SON-E 1 x 70W	CENP70S		55

Centurion PP65 with Photocell

Centurion PP65 with Photocell	Standard	3hr Emergency	LL/CW
TC-D 1 x 26W	CENP26P	CENP26PEMIN	53
TC-T 1 x 42W	CENP42P		54
HQI-E 1 x 70W	CENP70HP		55
SON-E 1 x 70W	CENP70SP		55


Centurion PP65 with Uplight Controller

Centurion PP65 with Uplight Controller	Standard	LL/CW
TC-D 1 x 26W	CENP26/UC	35
HQI-E 1 x 70W	CENP70H/UC	36
TC-T 1 x 42W	CENP42/UC	36

Options


COMEPS*	Add suffix /EP	i.e CENP26/EP
* 26W TC-D only		

Dimensions

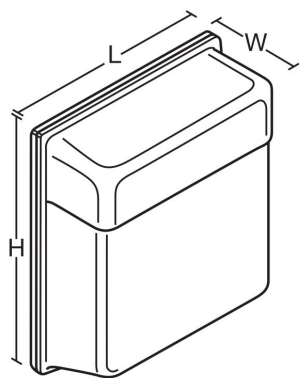

L	W	H	KG	KG(EM)
260	192	290	2	3

Photometric Performance

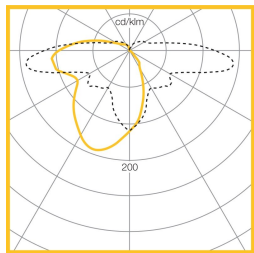

1 x 70W SON-E
LOR = 78.0%

To Specify

IP65 perimeter security lighting bulkhead suitable for direct surface mounting with a 4 point fixing employing two key slots and 2 locking screws and timed ignitor on SON versions. Black polycarbonate base and visor and UV stabilised prismatic polycarbonate diffuser. Fluorescent and HID lamp options - as Whitecroft Lighting CENTURION PP65