

Command CFLHUB

Command small area hub



Overview

- Low profile housing, perimeter mounted connector for mounting in limited void space
- Integrated mounting detail for surface, rod or trunking fixing
- Output connections
 - 3 x 6 pole lighting outputs rated at 6A
- Control Connections
 - Dimming or switching detector input socket
 - 1 - 3 gang manual switch override sockets
- Emergency lighting key switch socket
- Injection moulded flame retardant housing with mains entry cover and cable retainer The Command Classroom Hub can be used in conjunction with CFL components to deliver a wide variety of configurations. An on-line systems builder is available to show how the hub can be configured to control daylight dimming, occupancy, manual overrides and emergency lighting options. Use our web based configurator to define one of 57 ways to connect the CFHUB for a classroom application.


Order codes

Hub

Command Small Area Hub

CFLHUB

Dimensions

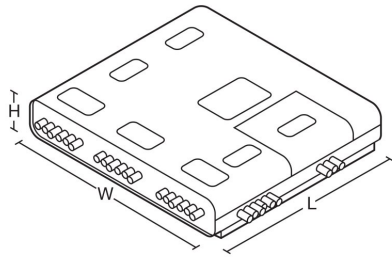

L	W	H
220	220	70

To Specify

Local area lighting control module with 3 off 6 pole 6A outputs, occupancy/ daylight detection and manual override switch inputs.
Compatible with GST18 connectors - as Whitecroft Lighting CFLHUB
