

Product Data Sheet

digidim

314

Tilting Microwave Detector

The 314 Tilting Microwave Detector provides occupancy detection for the automatic control of DALI lighting loads.




The 314 detects movement using its highly sensitive microwave detector. It works by emitting low-power microwave signals and measuring the reflections as the signals bounce off moving objects.


The 314 has an adjustable sensor head that allows the area of detection to be optimized for each particular purpose.

The unit is fully compatible with Helvar's lighting system design and control software; Designer, and DIGIDIM Toolbox.


Key Features

- Microwave sensor detects movement within the detection range allowing load control in response to changes in room occupancy.
- IR Receiver receives control and programming commands from a 307 IR (infrared) handset (available separately).
- Status LEDs flash red to indicate the following:


Walk Test LED active	 when movement is detected
Valid setting received	
Identify Active	

 = Red LED

Installation

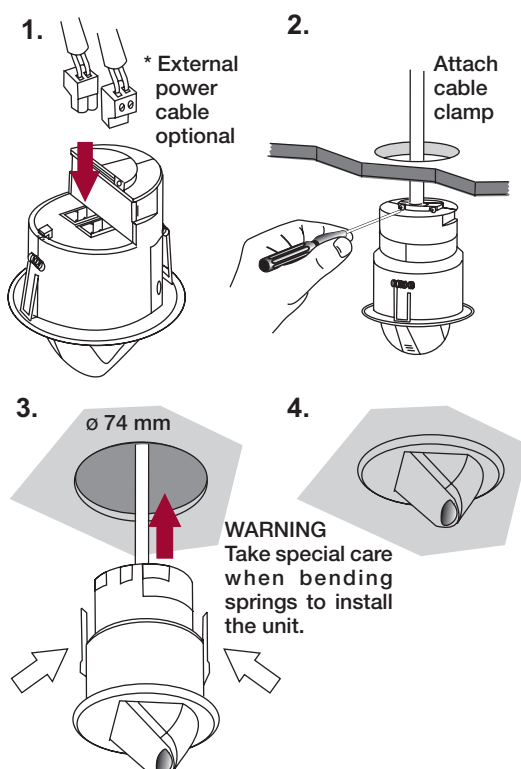

Dimensions

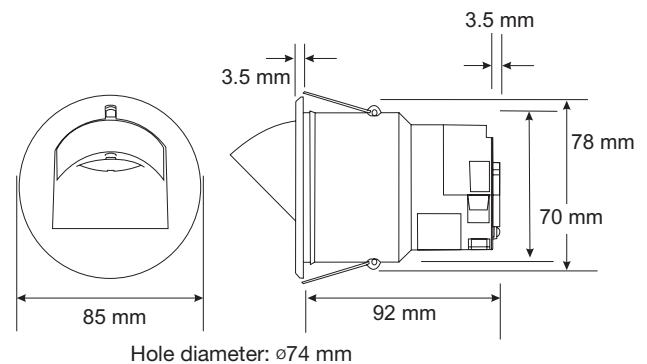

Installation Notes

- Position the sensor so that the occupants of the room are normally inside the detection zone.
- Do not install the sensor within 1 m of any lighting, forced air heating, or ventilation equipment.
- Do not fix the sensor to an unstable or vibrating surface.
- Install the unit as far away as possible from the surface of metal objects.
- The detection pattern illustrated is based on a mounting height of 2.8 m.
- A lower mounting height will decrease the overall size of the detection zone.

Helvar
www.helvar.com

Product Data Sheet

digidim

Tilting Microwave Detector

314

Connections

External power / DALI: Removable 2-pole connectors
Wire size: 0.5 mm² - 2.5 mm²
Solid or stranded

Power cable rating: All cables must be mains rated

Power

DALI Supply Input: 13 V to 22.5 V
DALI Consumption*: 40 mA
External Power: 12 V to 24 V, 0.5 W
(Optional)

* NOTE: DALI consumption is less than 2 mA when external power is supplied to the unit.

Microwave Operating Frequency

Frequency: 10.7 GHz

Mechanical Data

Dimensions: See diagrams
Material (casing): Non-flammable ABS
Finish / Colour: Matt / White
Weight: 124 g
IP rating: IP30


Operating Conditions

Ambient Temperature: 0°C to 35°C
Storage Temperature: -10°C to 70°C
Relative Humidity: Max 95%, non-condensing

Conformity and Standards


EMC: 2004/108/EEC
LVD: 2006/95/EEC
Environment: Complies with WEEE and RoHS directives

Connections


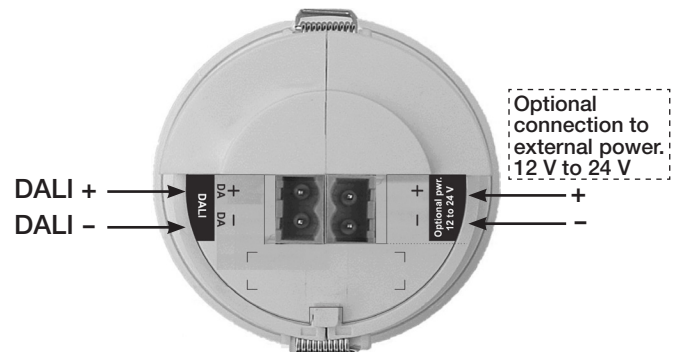


Detection Patterns

Ideal for large office or classroom, and for corridor and aisle applications

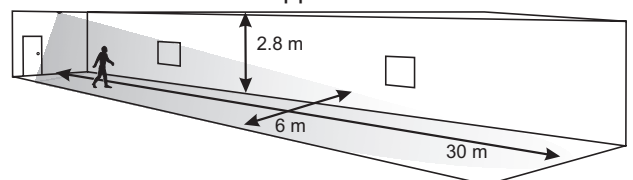

Ideal for open plan areas and offices

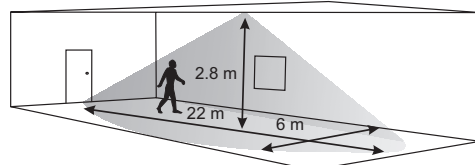

Helvar
www.helvar.com