





Lyne

Lighting that adapts
as buildings evolve

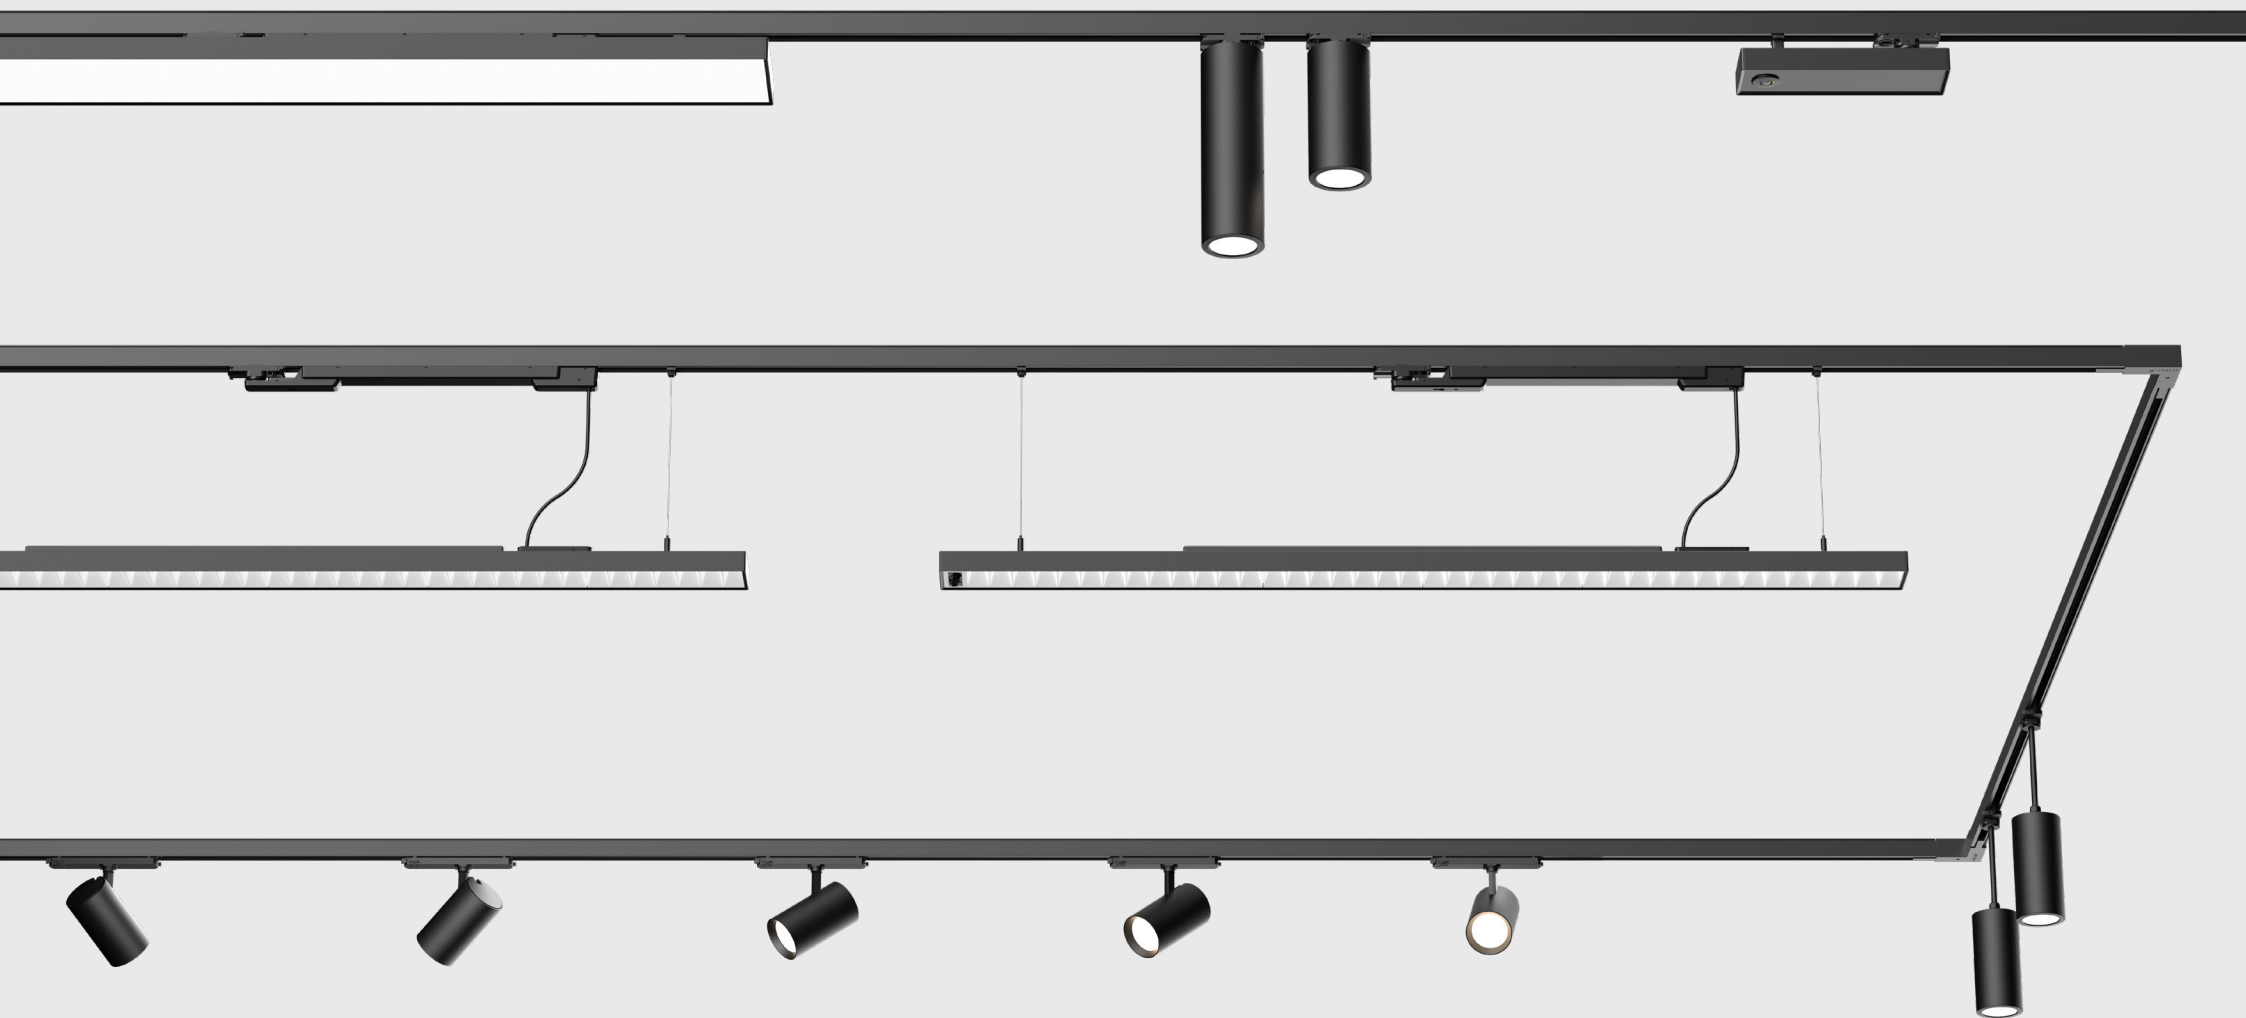


One system, endless possibilities




Designed, not adapted

Purpose-built as a track-first system, with every element engineered for seamless integration, comfort and performance.




Freedom today, flexibility tomorrow

Reposition, layer and refine lighting layouts as spaces develop, without compromising design intent.




A complete design toolkit

Linear, spotlight, downlight, emergency and controls, all within one coherent architectural language.



Layered performance, not locked-in compromise

Design for the space, then layer on emergency and controls with ease, enabled by a unified system approach.



Cleaner lines, lighter ceilings


Slimmer luminaires and modular drivers support clean, considered ceiling compositions and reduce material use.



Brilliant where it matters

Exceptional light quality supporting comfort, wellbeing and productivity while controlling budget.

Others adapt to track,
Lyne was designed around it



Plug and play,
change layouts in minutes

A WHOLE-LIFE SOLUTION

Reduce cost, complexity and carbon, for a lifetime

Designed to retain lighting infrastructure rather than replace it, the system enables change throughout the building lifecycle. Retain and reuse the track and simply adapt the luminaire layout, reducing disruption, controlling cost and lowering embodied carbon over time.

Specify early

Infrastructure designed for compliance from day one, ready to support future change.

Install faster

Single power feeds and plug-and-play luminaires reduce time on site and simplify coordination.

Reconfigure

Adapt layouts in minutes without redesigning or replacing the lighting backbone.



A lifetime of flexibility

Retain and scale the track while luminaires adapt to new layouts as needs and tenants change.

Maintain, upgrade, extend

Separate drivers and modular components enable fast maintenance and performance upgrades without complexity.

Reduce in-use energy

High efficacy and optimised optical distribution deliver lower operational energy while maintaining visual comfort, maximised through smart technology.

Retain infrastructure, reduce waste

Preserves the building's existing embodied carbon by avoiding unnecessary replacement.

Deliver cost certainty

Lower whole-life cost through retained assets, reduced disruption and fewer replacement cycles.



A flexible open-track system

Proprietary track systems create dependency. Lyne is built around a best-in-class open system track that supports change and protects long-term investment.

Recessed


Surface

Suspended

UPLIGHT

Layer light, adapt with ease

Layer uplight to create depth and balance. Integrated above the track or luminaire, with the flexibility to switch as designs evolve.

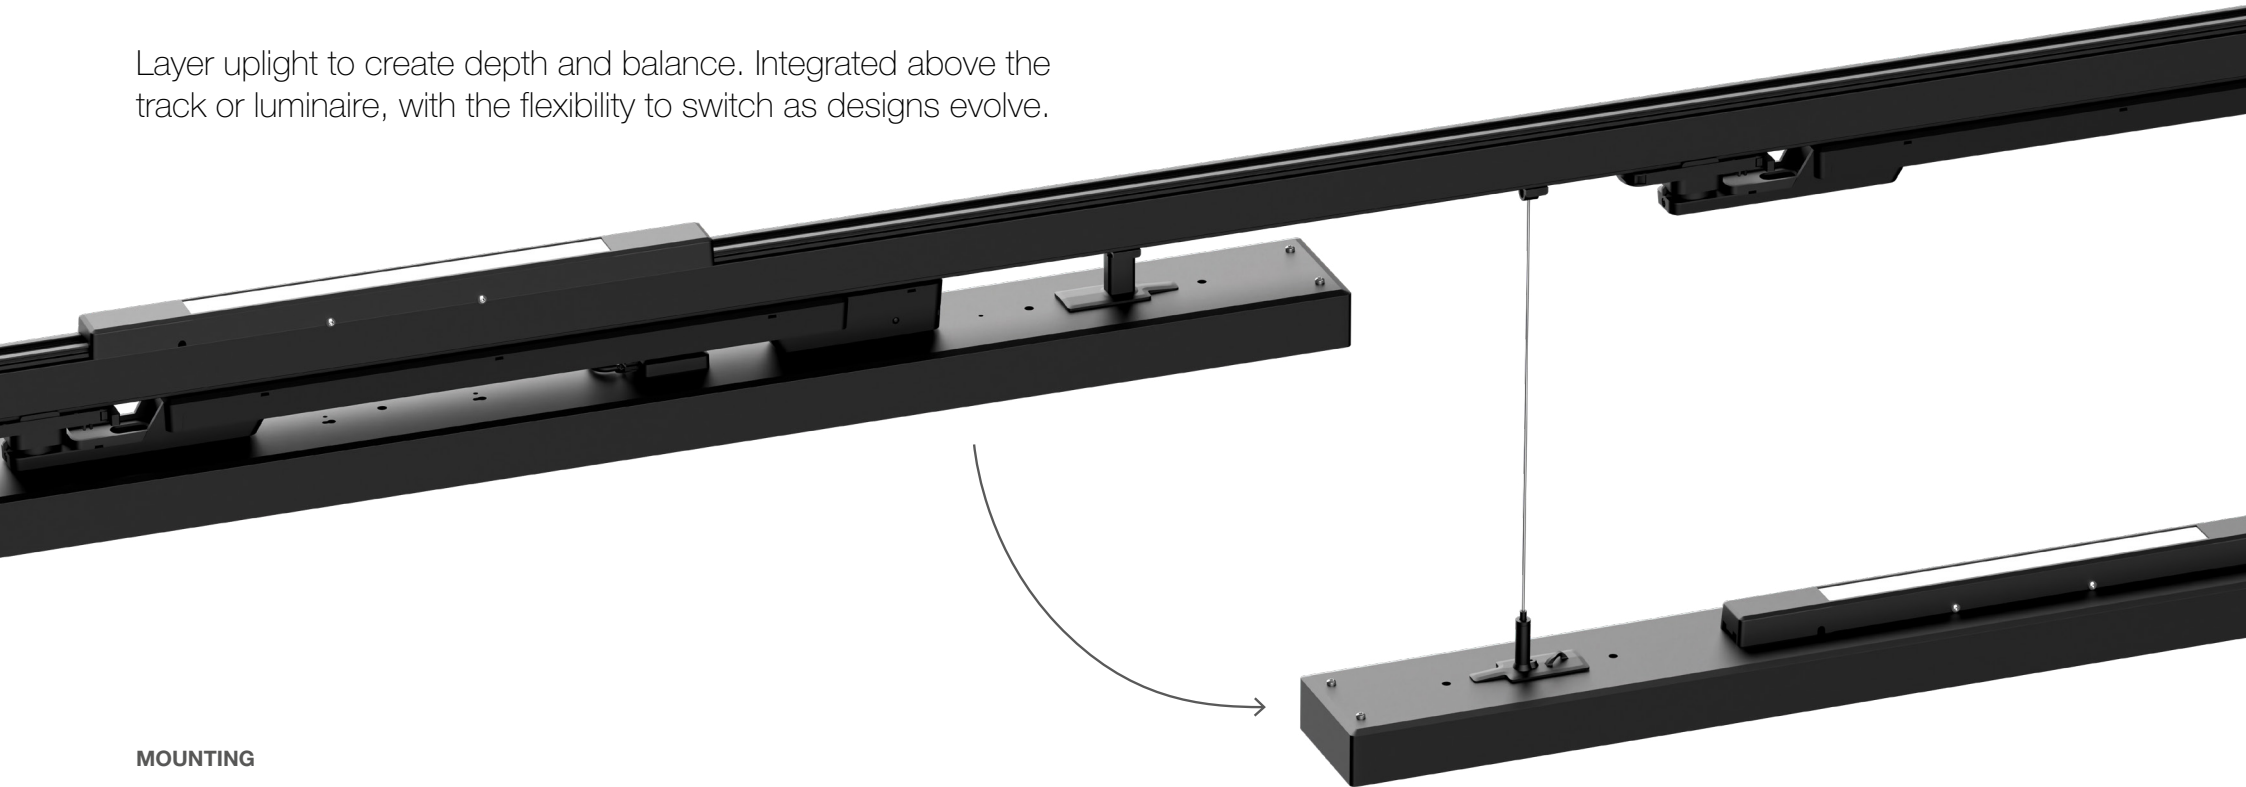


MOUNTING

Surface or suspended, simply switch

Change luminaire mounting type with a single attachment.

Mounting and direct/indirect light options

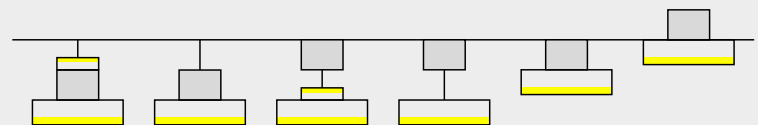

Lighting for wellbeing and productivity

Great lighting does more than illuminate a space. It shapes how people feel, focus and interact within it. Lyne provides a complete lighting toolkit designed to support wellbeing, enhance experience and improve productivity, enabling designers to deliver layered, human-centric environments with ease.

Play of brilliants

Energy, contrast and visual interest




Layered light adds depth, contrast and moments of visual excitement.

Through dynamic controls, suspended elements and accent lighting, Lyne enables spaces that feel engaging, expressive and alive.

Ambient luminescence

Comfort, clarity and visual ease



Soft, evenly distributed light creates a calm, comfortable environment where everything is visible without strain.

Lyne's linear luminaires deliver low-glare, uniform illumination that supports focus, reduces fatigue and forms the foundation of every scheme.

Focal glow

Focus, hierarchy and intent



Targeted light draws attention, defines zones and guides how a space is used.

With precision spotlights and downlights, Lyne allows designers to highlight key areas, support task performance and bring clarity to complex environments.

ORGANIC RESPONSE

Effortlessly smart

As your layout evolves, so does your smart lighting.


Controls layer seamlessly onto the Lyne track, allowing sensing, emergency reporting and data insights to adapt as luminaires are reconfigured.

Built-in intelligence for measurable performance.

D4i drivers and DALI-2 diagnostics deliver real-time energy monitoring and predictive maintenance insight to facility teams.

Smart by design, optimised through the Portal.

Fully integrated with Organic Response and its online Portal for adaptive control and building-wide insight.

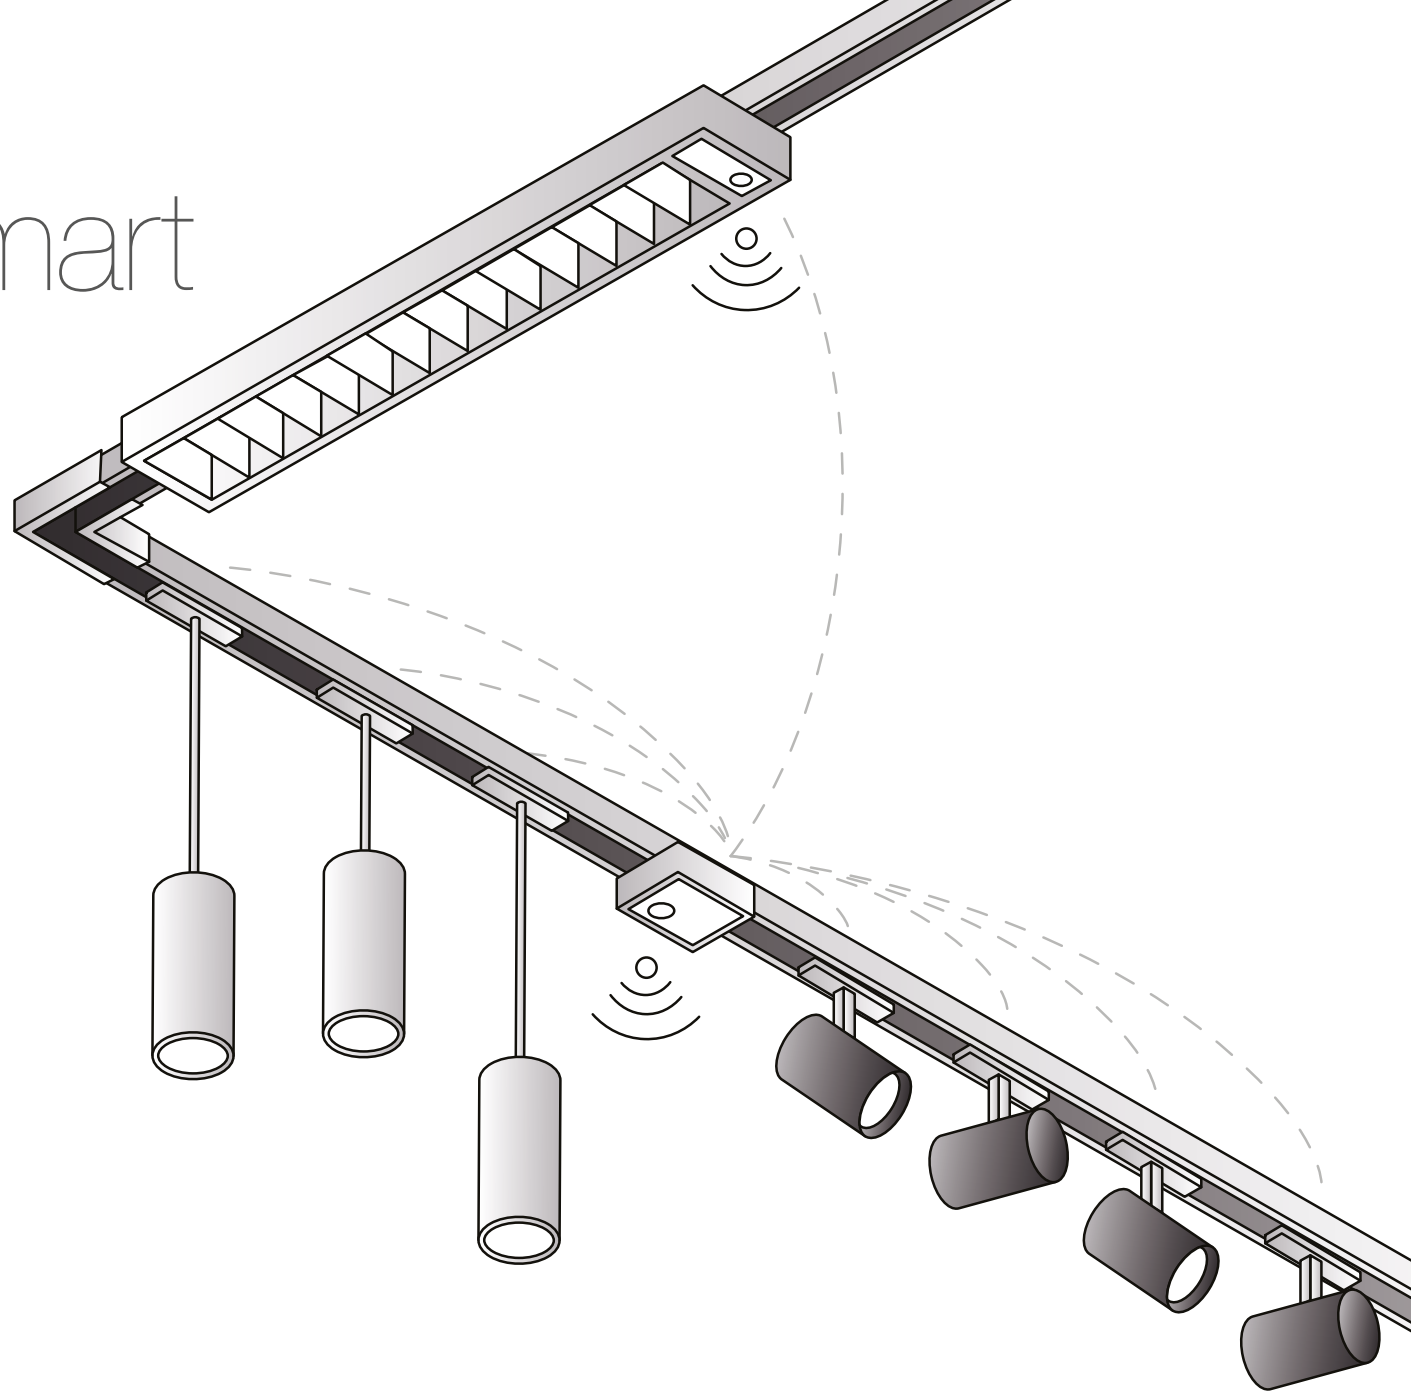

LINEAR

Lyne Fusion

Market-leading efficacy

Delivering up to 177 Lm/W efficacy. A new benchmark for energy conscious specification, without sacrificing quality.

Visual excellence and compliance

Meet strict workplace wellness standards without compromising on output. Up to 500 lx at 3m spacings supporting UGR <19 rating.


Circular economy commitment

Modular design for long-term upgradability. Future-ready for LED and sensor technology evolution.

Smart building integration

Real-time energy monitoring and advanced luminaire data for facilities managers. With DALI-2 diagnostics; D4i functionality with Organic Response models.

Mounting and direct/indirect light options

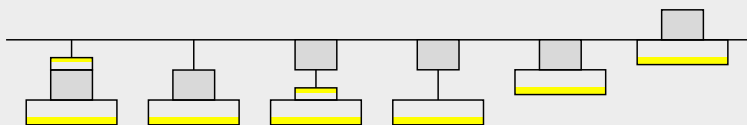

LINEAR

Lyne Prism

Unrivalled visual comfort

Homogeneous, diffused illumination that delivers superior visual comfort and uniformity. Available in two widths.

Architectural refinement

Low-profile form with premium bezel detailing supports clean, considered ceiling compositions. Nanoprismatic lighting control with an opal diffused aesthetic.


Sustainability and longevity

Built on circular design principles. Hardware engineered for long-term upgradability, reducing total cost of ownership and environmental impact.

Smart building integration

Real-time energy monitoring and advanced luminaire data for facilities managers. With D4i functionality and DALI-2 diagnostics.

Mounting and direct / indirect light options

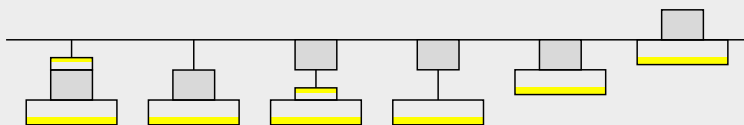

LINEAR

Mirage Track



Precision layering and versatility

Combine narrow and medium beam options to highlight breakout areas and desk ends while maintaining comfortable, balanced ambient light.

Architectural integration

Surface and suspended options, with body colours matched to the track, creating a seamless, cohesive architectural result.

Smart building integration

Every unit is built for the smart building era, with optional D4i functionality, DALI-2 diagnostics and real-time energy monitoring to optimise maintenance and utility spend.

Circular design, premium finish

Housed in a premium, textured body made from recycled aluminium, the range is built on circular design principles for long-term upgradability and reduced environmental impact.





SPOTLIGHT

Accent Track

Precision accent lighting

Deliver focused illumination to highlight architectural features, displays or key focal points within a space.

Visual layering and depth

Add a precise layer of accent light alongside ambient illumination to create contrast and visual hierarchy.

Compact architectural integration

A discreet form and in-track driver minimise visual clutter while delivering impactful accent lighting.



Scan the QR code
or click here for
**PRODUCT
INFORMATION**



EMERGENCY

Florin Track

Seamless emergency integration

Integrated emergency lighting that delivers compliance without disrupting your design or overall scheme.

Reliable performance when it matters

Open area and escape route coverage with long-life LiFePO₄ battery technology for dependable operation in critical situations.

Assured compliance and control

Locks securely to the track for compliance, with automated testing enabled through Organic Response smart lighting controls.



Scan the QR code
or click here for
**PRODUCT
INFORMATION**


Change, simplified

A WHOLE-LIFE TRACK SOLUTION


Reduce
COST

Reduce
COMPLEXITY

Reduce
IMPACT



Compliant and ready for lease
Specify early, adapt later.

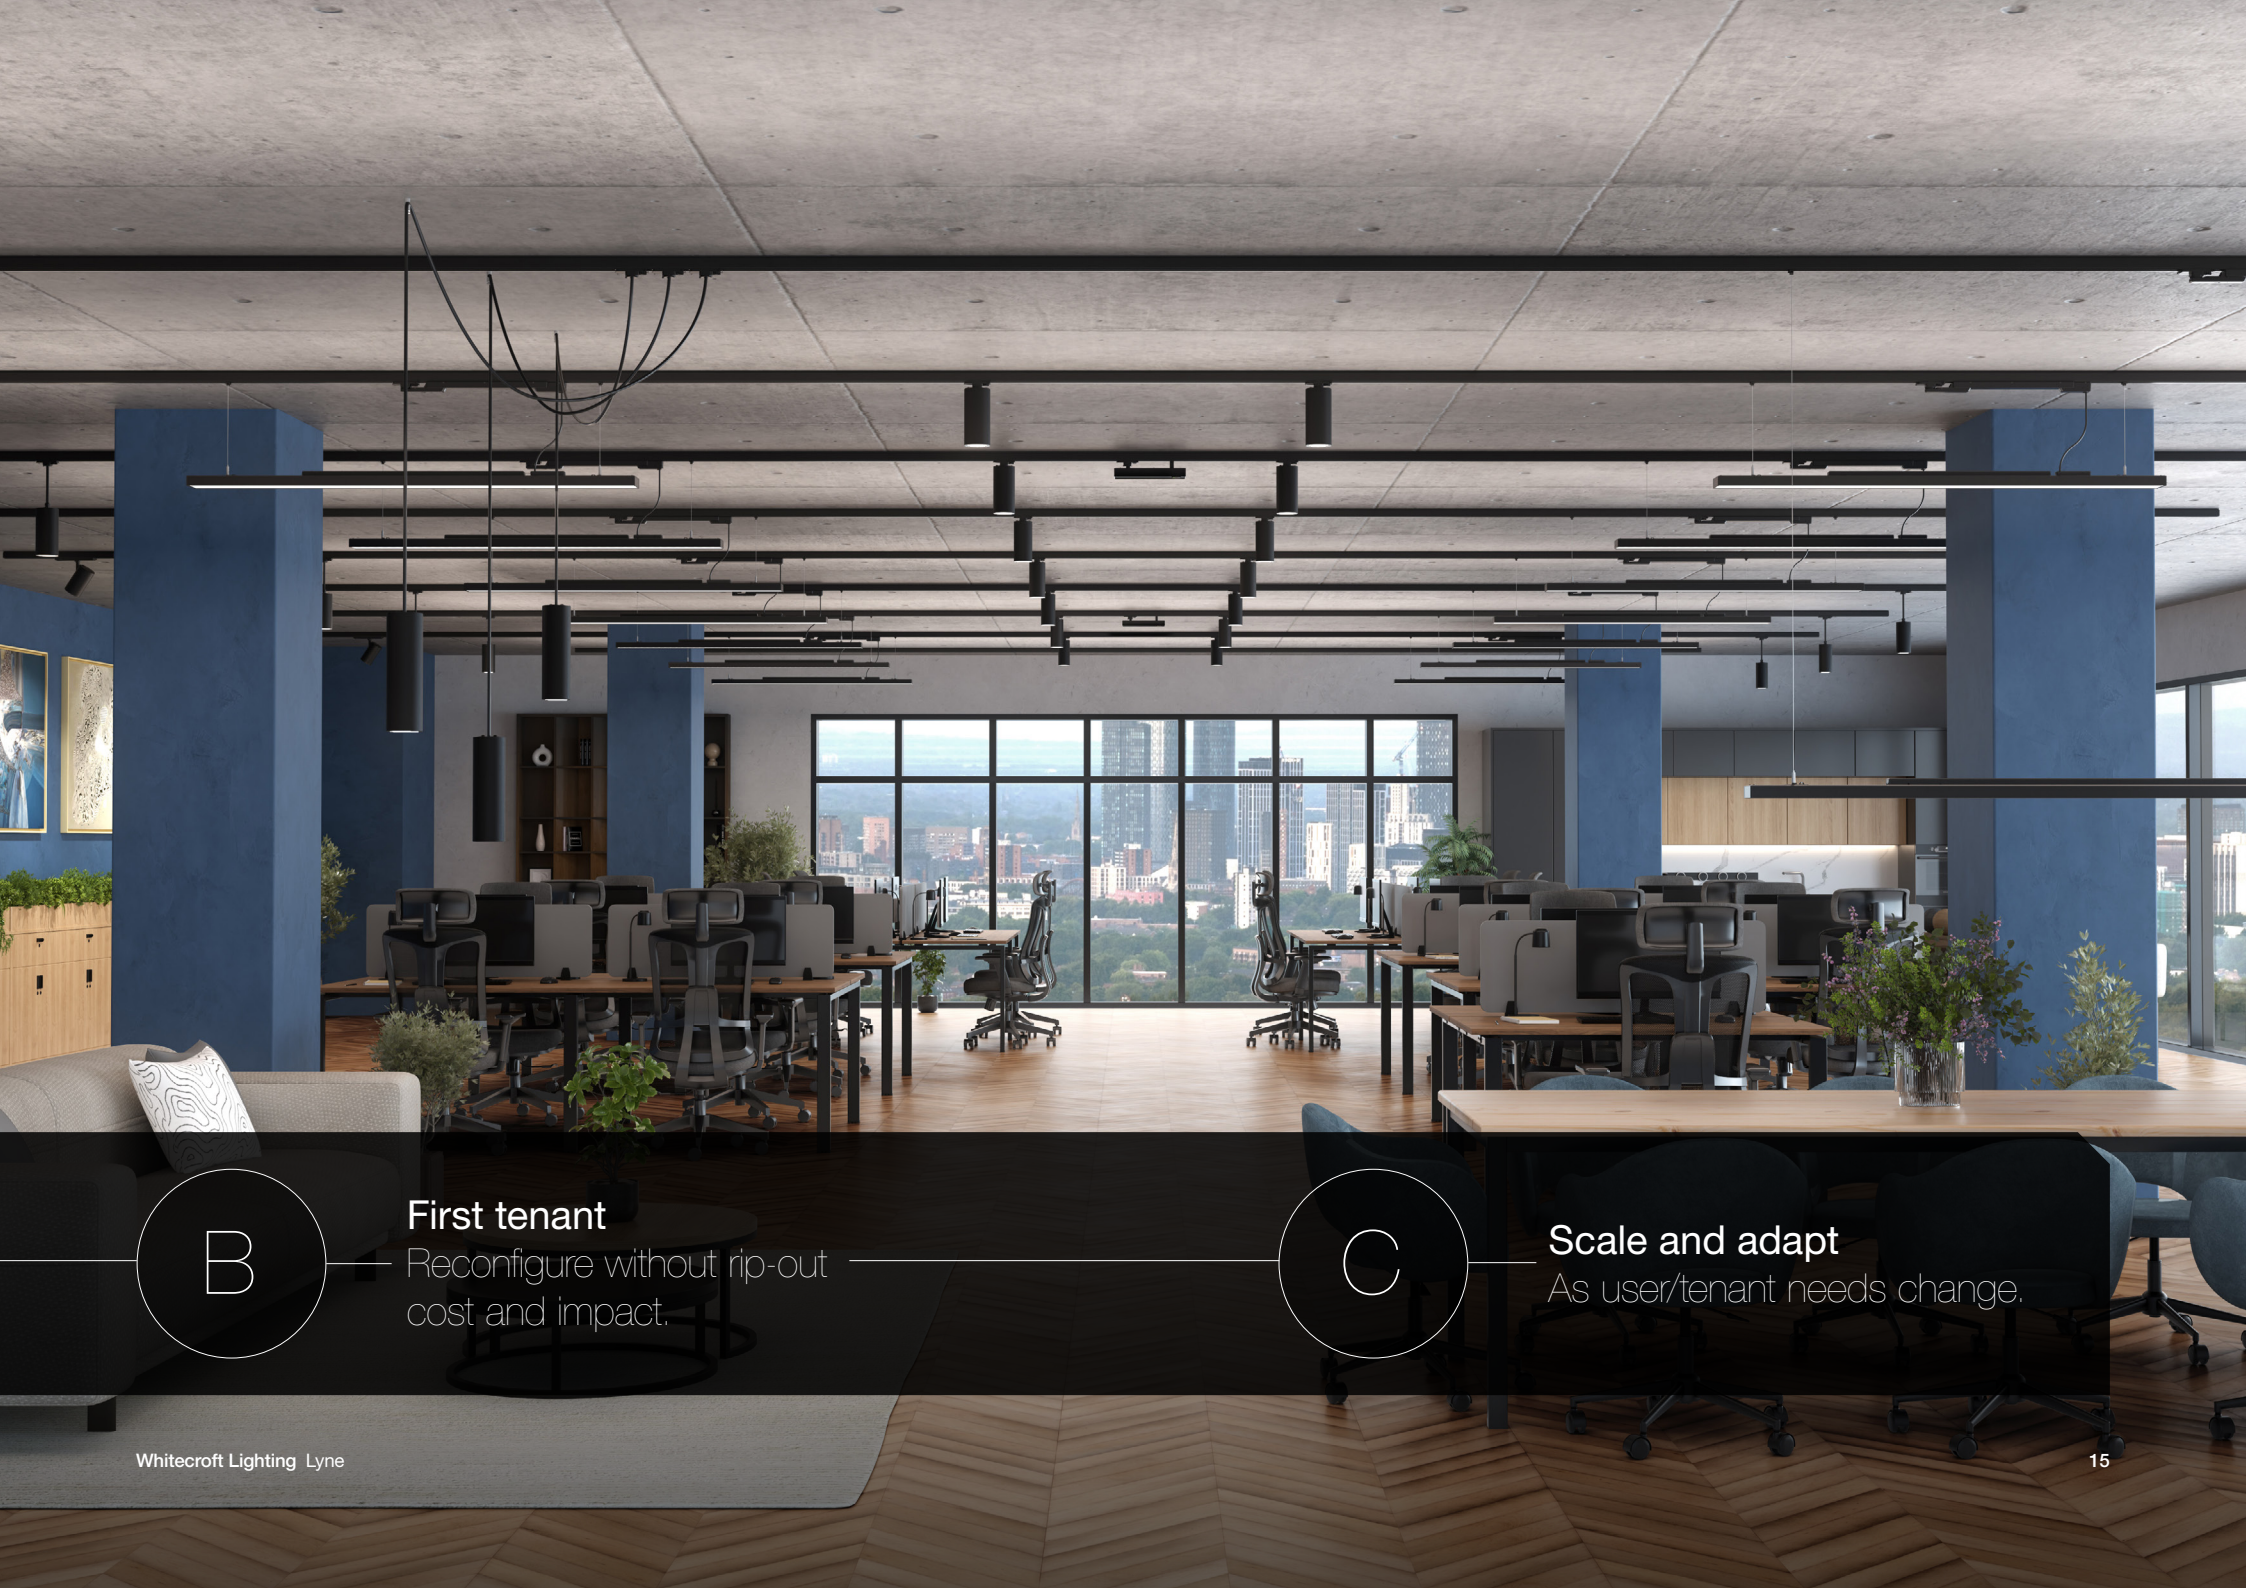

B

First tenant

Reconfigure without rip-out
cost and impact.


C

Scale and adapt

As user/tenant needs change.

Detached drivers, built-in performance

Separating the driver from the luminaire unlocks higher efficiency, greater flexibility and a system designed to evolve.

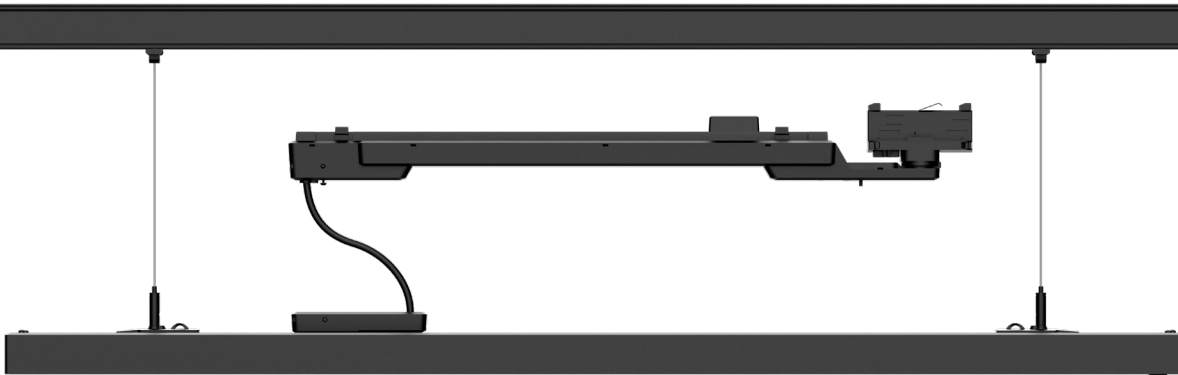

Performance

- Up to 10% efficiency gain over in-track drivers
- DALI 251, 252, 253 as standard with optional D4i functionality on smart-enabled luminaires
- Higher power capability across a wide range of applications

Flexible and future-ready

- One driver platform across multiple luminaires
- Modular light engines and indirect elements
- Decoupled drivers simplify maintenance and enable easy upgrades

Smart project partners

A smart project isn't just about technology; it's about removing the friction between delivery, installation, and long-term data.

By bringing together Geopak™, Lyne and Organic Response, you can improve efficiency, sustainability, and long-term performance, delivering a truly smart project.

Geopak™

Reusable, minimal single-use packaging with pinpoint tracking and automated delivery verification for minimal waste, maximum efficiency.

Lyne

Lasting infrastructure with rapid, "click-in" installation and easy future-proofing, ensuring the building remains compliant and flexible for decades.

organic response

Control without the complexity. Out-of-the-box digital commissioning for total energy monitoring and emergency compliance from Day 1.



Custom Made

Power or mount modified or bespoke
luminaires directly from track.



Visit **Custom Made** from Whitecroft.



Product information

Lyne Fusion

Luminaire	Mounting	Optic	Length (mm)	Width	Nominal output (lumens)	Driver type	Organic Response	Body colour	Colour temperature	Colour rendition
Lyne Fusion Direct	Track surface / Track suspended	Fusion	1000	86 mm	2350	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Fusion Direct	Track surface / Track suspended	Fusion	1500	86 mm	3525	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Fusion Direct	Track surface / Track suspended	Fusion	2000	86 mm	4600	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Fusion Direct/Indirect	Track surface / Track suspended	Fusion	1000	86 mm	2550	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Fusion Direct/Indirect	Track surface / Track suspended	Fusion	1500	86 mm	3925	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Fusion Direct/Indirect	Track surface / Track suspended	Fusion	2000	86 mm	5200	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90



Lyne Prism

Luminaire	Mounting	Optic	Length (mm)	Width	Nominal output (lumens)	Driver type	Organic Response	Body colour	Colour temperature	Colour rendition
Lyne Prism Direct	Track surface / Track suspended	Nanoprism	1000	86 mm	1800	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct	Track surface / Track suspended	Nanoprism	1500	86 mm	2690	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct	Track surface / Track suspended	Nanoprism	2000	86 mm	3580	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct	Track surface / Track suspended	Nanoprism	1000	157 mm	3000	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct	Track surface / Track suspended	Nanoprism	1500	157 mm	3800 & 4600	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct/Indirect	Track surface / Track suspended	Nanoprism	1000	86 mm	1950	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct/Indirect	Track surface / Track suspended	Nanoprism	1500	86 mm	2990	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct/Indirect	Track surface / Track suspended	Nanoprism	2000	86 mm	4030	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct/Indirect	Track surface / Track suspended	Nanoprism	1000	157 mm	3230	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90
Lyne Prism Direct/Indirect	Track surface / Track suspended	Nanoprism	1500	157 mm	4250 & 5150	DALI-2	Yes / N/A	White / Black	3000K / 4000K	Ra80 / Ra90



MirageTrack

Luminaire	Mounting	Reflector	Beam angle	Height	Diameter	Nominal output (lumens)	Driver type	Organic Response	Body colour	Colour temperature	Colour rendition
Mirage Track C88	Track surface/Track suspended	Black/specular/semi-specular/white	Medium/Narrow	290	C88	500/1000	DALI-2	Yes/N/A	White/Black	3000K/4000K	Ra80/Ra90
Mirage Track C88	Track surface/Track suspended	Black/specular/semi-specular/white	Medium/Narrow	190	C88	500/1000	DALI-2	Yes/N/A	White/Black	3000K/4000K	Ra80/Ra90




Accent Track

Luminaire	Mounting	Beam angle	Nominal output (lumens)	Driver type	Organic Response	Body colour	Colour temperature	Colour rendition
Accent Track	Track surface	Narrow, Medium, Wide	1500/2000/2500/3000/5000	DALI-2	N/A	White/Black	3000K/4000K	Ra80/Ra90



Controls, emergency and track

								
Organic Response Track	Florin Track	Track – 1m, 2m, 3m	Suspension – black / silver	Track adapter – join	Track adapter – L	Track adapter – X	Track adapter – T	Track adapter – Flex



UK Head Office

Whitecroft Lighting Ltd
Burlington Street
Ashton-Under-Lyne
Lancashire
OL7 0AX

T +44 (0)161 330 6811
email@whitecroftright.com

London Office

Whitecroft Lighting Ltd
Suite 779 Salisbury House
London Wall
Finsbury Circus
EC2M 5SQ

T +44 (0)161 330 6811

Rep. Ireland Office

Fagerhult Ltd
F1 Calmount Park
Ballymount, Dublin 12
Ireland

T +353 (0)1 426 0200
info@fagerhult.ie
www.fagerhult.ie

