

Hygiene

IP54/IP20 recessed luminaire



Optics

- Screw retained frame with Tp(A) Polycarbonate diffuser. Smooth face on the room side for easy cleaning
- Lamp options:
 - 3 or 4 x 14W T5
 - 4 x 24/28W T5

Body

- Steel body finished white, with bonded diffuser
 - RAL Colour: White RAL9010.
 - Concealed screw fixing detail
 - IP54 to the void with the front frame in place, IP20 with the front frame removed
 - Suitable for T15 and T25 exposed T, Spring T and prepared aperture ceilings
-

Order codes

Hygiene

Hygiene	HF Gear	3hr Emergency	LL/CW
T5 3 x 14W	HYGP314	HYGP314EMIN	48
T5 4 x 14W	HYGP414	HYGP414EMIN	50
T5 4 x 24W	HYGP424	HYGP424EMIN	41
T5 4 x 28W	HYGP428	HYGP428EMIN	52

Accessories


Plasterboard Installation Kit	LUMAFIXBKTKIT
-------------------------------	---------------

Options

COMEPS	Add suffix /EP	i.e. HYGP314/EP
Recessing Panel*	Add suffix R	i.e. HYGP314R


*To maintain IP54 on spring T ceilings

Dimensions

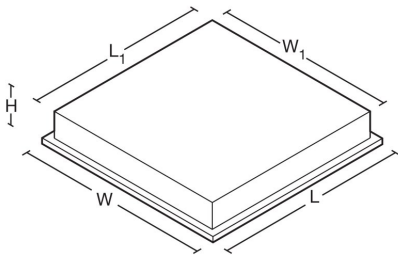


VERSION	L	L1	W	W1	H	KG
3/4 x 14W & 4 x 24W	599	570	599	540	106	6
4 x 28W	1199	1170	599	540	106	7

Photometric Performance




3 x 14W T5
LOR = 61.5%
SHR MAX = 1.51



4 x 14W T5
LOR = 61.6%
SHR MAX = 1.51

Performance Guide



Lamps	4 x 14W T5
Illuminance	540 lux
Spacing	2.4m x 2.4m
Maintenance	0.8
Reflectance	70/50/20
Ceiling Height	2.7m
Working plane	0.8m

To Specify

Recessed T5 modular luminaire with steel body and diffuser frame finished white, sealed to IP54 on the front face - as Whitecroft Lighting HYGIENE