

Micro Spot 65

IP65 surface mounted spotlight for feature lighting



Ground Spike



Graphite Grey



Silver/grey

Optics

- 1250 lumens, 14W
- 3000K LED
- Ra90 colour rendition
- Medium beam distribution

Body

- IP65, IK08 protection rated
- Die cast aluminium body
- Polyester powder coated suitable for saline and corrosive environments
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- Graphite grey or silver/grey finish
- Tempered glass diffuser
- Adjustable aiming direction
- Surface mounting
- Optional mounting 'spike' for installation into soft ground
- Fitted cable gland
- Fixed output LED driver
- Graphite grey RAL 7024
- Silver/grey RAL 9006

Order codes

Graphite Grey

Graphite Grey	Fixed Output	LL/CW	L70
1250 lumen, 14W	MCLH13KG	89	50k

Accessories

GROUND MOUNTING SPIKE	MCLSPIKE
-----------------------	----------


Options

4000K LED ON REQUEST	Replace 3K with 4K	i.e MCLH14KG
SILVER/GREY	Replace G with S	i.e MCLH13KS

LED Performance


Colour Temp	RA (CRI)	Colour consistency
3000K	>90	MacAdam 3 SDCM

Dimensions

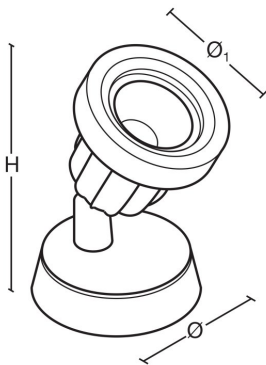

H	KG(EM)	Ø	Ø1
194	0.8	127	114

Photometric Performance



14W 3000K 1250
Lumens
LOR = 100.0%

To Specify

Surface mounted IP65 die cast aluminium LED spotlight with medium beam distribution. Finished in polyester powder coated graphite grey or silver/grey – as Whitecroft MICRO SPOT 65
