

Mirage 3 C88 Surface and Suspended



Surface or suspended mounted downlighter ideal for creating feature lighting



Silver body with semi-specular reflector - Suspended



Black body with black reflector - Surface mount



White body with specular reflector - Surface mount



Silver body with semi-specular reflector - Surface mount

Overview

From elegantly lighting a reception desk in an entrance atria to providing visual interest and feature lighting to an open plan office, Mirage 3 C88 Surface and Suspended is suitable for a variety of applications. Offered in a range of outputs and three body colours, with four reflectors finishes, Mirage 3 C88 has a variant to suit any lighting design, adding visual interest with a fantastic lit effect.

Mirage 3 C88 features circular design principles using recycled components to ensure minimal impact on the environment and offers a choice which can be upgraded throughout its lifecycle.

Mirage 3 C88 offers surface and suspended mounting options, with a first fix bracket for simple installation. With the option of a decorative cord suspension kit available in three cord colours, and a ceiling rose to match the luminaire body colour, Mirage 3 C88 provides fantastic feature lighting, blending into any architectural style. Available with Organic Response® options, Mirage 3 C88 integrates into any lighting design, providing an efficient solution for your space.

Optics

- Light outputs ranging from 500 lumens to 1000 lumens (nominal, 4000K Ra80)
- Efficacy - Up to 133 lm/W (4000K, Ra80)
- Precision injection moulded reflectors available in four finishes
 - Specular

- Semi-specular
- Black
- White
- Narrow and medium beam distributions are ideal for feature lighting
- Available with 4000K 'cool' or 3000K 'warm' white LEDs
- Available with Ra80 and Ra90 colour rendition
- Control gear: DALI as standard

Body


- Extruded aluminium body available in three colour options, to include white (RAL 9003), silver (RAL 9006) or black (RAL 9005)
- Body and reflector type note:
 - Black body available with a black reflector only
 - White body available with a specular, semi-specular and white reflector
 - Silver body available with a specular and semi-specular reflector
- IP20 as standard
- Graphite embedded heatsink
- Luminaire supplied complete with driver
- Suspension mounting using decorative cord with ceiling rose. One suspension kit is required per luminaire and contains the cord and ceiling rose. Suspension kits are to be ordered separately
- Decorative cord suspension kit available in three cord colours, complete with ceiling rose (available in three colours to match luminaire body colour)
- Decorative suspension cord details
 - White cord with either white, silver or black ceiling rose
 - Black cord with either white, silver or black ceiling rose
 - Grey cord with either white, silver or black ceiling rose
- Optional integral Organic Response® wireless mini passive node that communicates with its neighbouring luminaires. Note, an Organic Response® sensor will be required within the lighting scheme

?Note: All DALI variants require 1 DALI address per driver.

LED Performance

Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM
3000K	>80	MacAdam 3 SDCM
4000K	>90	MacAdam 3 SDCM
3000K	>90	MacAdam 3 SDCM

Dimensions

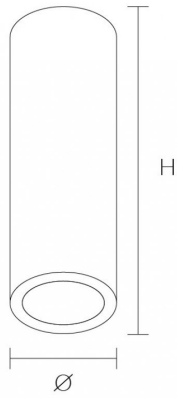

VERSION	H	Ø
C88 Surface	290	88
C88 Suspended	290	88

To Specify

Surface or suspended mounted premium downlighter available in three body colours with four reflector types. Graphite heatsink for optimum thermal management and superior optics designed for maximum visual comfort. A modern aesthetic, designed to offer visual interest in any lighting scheme - As Whitecroft Lighting MIRAGE 3 SURFACE AND SUSPENDED