

# Mirage 3 C88 Surface and Suspended

Whitecroft  
lighting

Surface or suspended mounted downlighter ideal for creating feature lighting

120+  
LL/CW

COM  
✓

IK03

IP20



Silver body with semi-specular reflector - Suspended



Black body with black reflector - Surface mount



White body with specular reflector - Surface mount



Silver body with semi-specular reflector - Surface mount

## Overview

From elegantly lighting a reception desk in an entrance atria to providing visual interest and feature lighting to an open plan office, Mirage 3 C88 Surface and Suspended is suitable for a variety of applications. Offered in a range of outputs and three body colours, with four reflectors finishes, Mirage 3 C88 has a variant to suit any lighting design, adding visual interest with a fantastic lit effect.

Mirage 3 C88 features circular design principles using recycled components to ensure minimal impact on the environment and offers a choice which can be upgraded throughout its lifecycle.

Mirage 3 C88 offers surface and suspended mounting options, with a first fix bracket for simple installation. With the option of a decorative cord suspension kit available in three cord colours, and a ceiling rose to match the luminaire body colour, Mirage 3 C88 provides fantastic feature lighting, blending into any architectural style. Available with Organic Response® options, Mirage 3 C88 integrates into any lighting design, providing an efficient solution for your space.

## Optics

- Light outputs ranging from 500 lumens to 1000 lumens (nominal, 4000K Ra80)
- Efficacy - Up to 133 lm/W (4000K, Ra80)
- Precision injection moulded reflectors available in four finishes
  - Specular

- Semi-specular
- Black
- White
- Narrow and medium beam distributions are ideal for feature lighting
- Available with 4000K 'cool' or 3000K 'warm' white LEDs
- Available with Ra80 and Ra90 colour rendition
- Control gear: DALI as standard

## Body


- Extruded aluminium body available in three colour options, to include white (RAL 9003), silver (RAL 9006) or black (RAL 9005)
- Body and reflector type note:
  - Black body available with a black reflector only
  - White body available with a specular, semi-specular and white reflector
  - Silver body available with a specular and semi-specular reflector
- IP20 as standard
- Graphite embedded heatsink
- Luminaire supplied complete with driver
- Suspension mounting using decorative cord with ceiling rose. One suspension kit is required per luminaire and contains the cord and ceiling rose. Suspension kits are to be ordered separately
- Decorative cord suspension kit available in three cord colours, complete with ceiling rose (available in three colours to match luminaire body colour)
- Decorative suspension cord details
  - White cord with either white, silver or black ceiling rose
  - Black cord with either white, silver or black ceiling rose
  - Grey cord with either white, silver or black ceiling rose
- Optional integral Organic Response® wireless mini passive node that communicates with its neighbouring luminaires. Note, an Organic Response® sensor will be required within the lighting scheme

?Note: All DALI variants require 1 DALI address per driver.

## LED Performance

Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM
3000K	>80	MacAdam 3 SDCM
4000K	>90	MacAdam 3 SDCM
3000K	>90	MacAdam 3 SDCM

# Dimensions

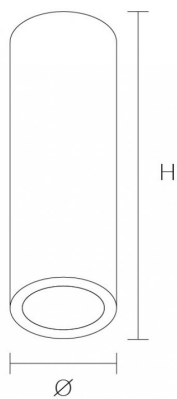

VERSION	H	Ø
C88 Surface	290	88
C88 Suspended	290	88

## To Specify

Surface or suspended mounted premium downlighter available in three body colours with four reflector types. Graphite heatsink for optimum thermal management and superior optics designed for maximum visual comfort. A modern aesthetic, designed to offer visual interest in any lighting scheme - As Whitecroft Lighting MIRAGE 3 SURFACE AND SUSPENDED